




SPECIFICATION SHEET : WHSG4-UNV-T8-LB

This Is An Original Product From Fulham Co., Inc

Description : WORKHORSE Specifier Grade Series Electronic Ballast, Drop In Replacement for Magnetic Ballast, Parallel Lamp Operation, THD Less Than 10%

This Ballast Will Operate Following Lamps.




F17T8 / F25T8 / F32T8 / F40T8

ELECTRICAL DATA (120V APPLICATION)

INPUT VOLT: 120V ± 10% , 50/60Hz						
LAMP WATTS/TYPE	F25T8	F 32T8	F40T8	F17T8	F 25T8	F32T8
LAMPS OPERATED	3			4		
INPUT WATTS	63	85	100	55	77	104
LINE CURRENT:	0.53	0.71	0.83	0.46	0.64	0.87
POWER FACTOR	0.99	0.99	0.99	0.99	0.99	0.99
BALLAST FACTOR	0.84	0.89	0.83	0.81	0.78	0.82
EFFICACY FACTOR	1.34	1.04	0.83	1.47	1.02	0.78
THD	5%	4%	3%	5%	5%	3%
CURRENT CREST FACTOR	< 1.7					
EMI/RFI COMPLIANCE	FCC PART 18-A					
SOUND RATING	" A "					
BALLAST TYPE	INSTANT START					
VOLTAGE TRANSIENTS	ANSI C82.11 - 1993					
INPUT/PROTECTION	FUSE					
OUTPUT/PROTECTION	-					
MIN. OPERATING TEMP	0 °C (32 ° F)					
MAX. CASE TEMP	75 °C (167 ° F)					
TYPE "HL" APPROVAL	APPROVED FOR HAZARDOUS LOCATION					
ENERGY STAR 4.0	-					
APPROVALS/CLASS	UL /cUL LISTED, CLASS " P ", 1 OUTDOOR					
REMOTE MOUNTING	18 FT MAX.					


MECHANICAL DATA

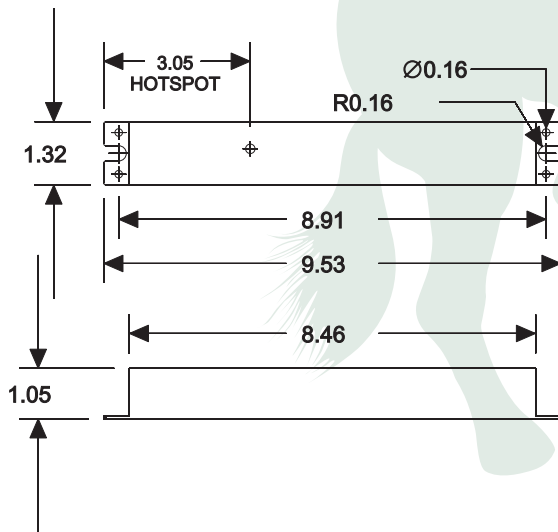

Where : L = Length, W = Width, H = Height

WIRING DIAGRAMS

WIRE	BLACK	WHITE	RED	BLUE	YELLOW	BROWN
LENGTH - INCHES	25 ± 1"	25 ± 1"	46 ± 1"	31 ± 1"		

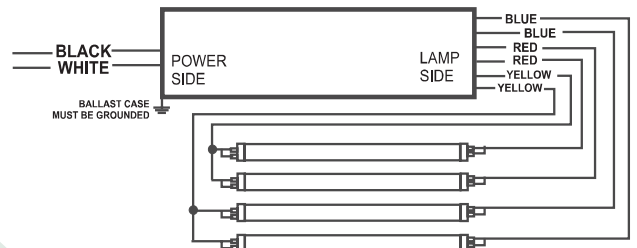

FOR THREE LAMP APPLICATION, CAP ONE BLUE WIRE INSULATE TO 600V.

NOTE : This Ballast Case Must Be Grounded

Fulham Co., Inc extends limited warranty only to the original purchaser or to the first user for the period of 5 years from the date of manufacture as indicated by the date code stamped on each product and when properly installed and under normal conditions of use. For additional warranty guide line, please refer to our Complete Product Catalog OR call Customer Service at 1-800-2-Fulham.

DUE TO A PROGRAM OF CONTINUOUS IMPROVEMENT, FULHAM Co., INC RESERVES THE RIGHT TO MAKE ANY VARIATION IN DESIGN OR CONSTRUCTION TO THE EQUIPMENT DESCRIBED.

Address : 12705 South Van Ness Ave., Hawthorne, CA 90250 Tel.: 1-800-2-fulham, Fax.: 1-323-754-9060. Website: www.fulham.com 02-2006-149-1 rev




SPECIFICATION SHEET : WHSG4-UNV-T8-LB

This Is An Original Product From Fulham Co., Inc

Description : WORKHORSE Specifier Grade Series Electronic Ballast, Drop In Replacement for Magnetic Ballast, Parallel Lamp Operation, THD Less Than 10%

This Ballast Will Operate Following Lamps.




F17T8 / F25T8 / F32T8 / F40T8

ELECTRICAL DATA (230V APPLICATION)

INPUT VOLT: 230V ± 10% , 50/60Hz						
LAMP WATTS/TYPE	F25T8	F 32T8	F40T8	F17T8	F 25T8	F32T8
LAMPS OPERATED	3			4		
INPUT WATTS	63	83	98	55	76	102
LINE CURRENT:	0.28	0.37	0.43	0.24	0.33	0.45
POWER FACTOR	0.98	0.99	0.99	0.97	0.99	0.99
BALLAST FACTOR	0.84	0.88	0.83	0.81	0.78	0.83
EFFICACY FACTOR	1.34	1.05	0.85	1.48	1.03	0.81
THD	7%	7%	8%	7%	7%	8%
CURRENT CREST FACTOR	< 1.7					
EMI/RFI COMPLIANCE	FCC PART 18-A					
SOUND RATING	" A "					
BALLAST TYPE	INSTANT START					
VOLTAGE TRANSIENTS	ANSI C82.11 - 1993					
INPUT/PROTECTION	FUSE					
OUTPUT/PROTECTION	-					
MIN. OPERATING TEMP	0 °C (32 ° F)					
MAX. CASE TEMP	75 °C (167 ° F)					
TYPE "HL" APPROVAL	APPROVED FOR HAZARDOUS LOCATION					
ENERGY STAR 4.0	-					
APPROVALS/CLASS	UL /cUL LISTED, CLASS " P ", 1 OUTDOOR					
REMOTE MOUNTING	18 FT MAX.					


MECHANICAL DATA

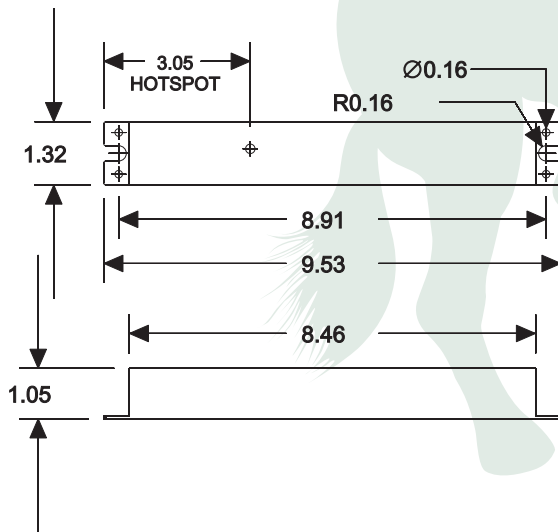

Where : L = Length, W = Width, H = Height

WIRING DIAGRAMS

WIRE	BLACK	WHITE	RED	BLUE	YELLOW	BROWN
LENGTH - INCHES	25 ± 1"	25 ± 1"	46 ± 1"	31 ± 1"		

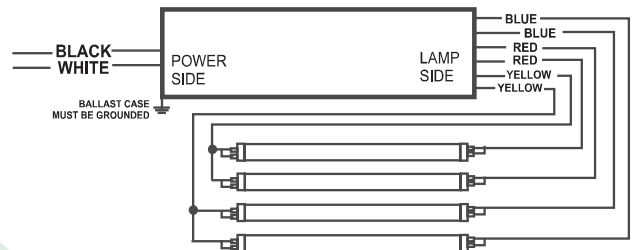

FOR THREE LAMP APPLICATION, CAP ONE BLUE WIRE INSULATE TO 600V.

NOTE : This Ballast Case Must Be Grounded

Fulham Co., Inc extends limited warranty only to the original purchaser or to the first user for the period of 5 years from the date of manufacture as indicated by the date code stamped on each product and when properly installed and under normal conditions of use. For additional warranty guide line, please refer to our Complete Product Catalog OR call Customer Service at 1-800-2-Fulham.

DUE TO A PROGRAM OF CONTINUOUS IMPROVEMENT, FULHAM Co., INC RESERVES THE RIGHT TO MAKE ANY VARIATION IN DESIGN OR CONSTRUCTION TO THE EQUIPMENT DESCRIBED.

Address : 12705 South Van Ness Ave., Hawthorne, CA 90250 Tel.: 1-800-2-fulham, Fax.: 1-323-754-9060. Website: www.fulham.com 02-2006-149-2 rev




SPECIFICATION SHEET : WHSG4-UNV-T8-LB

This Is An Original Product From Fulham Co., Inc

Description : WORKHORSE Specifier Grade Series Electronic Ballast, Drop In Replacement for Magnetic Ballast, Parallel Lamp Operation, THD Less Than 10%

This Ballast Will Operate Following Lamps.




F17T8 / F25T8 / F32T8 / F40T8

ELECTRICAL DATA (277V APPLICATION)

INPUT VOLT: 277V ± 10% , 50/60Hz						
LAMP WATTS/TYPE	F25T8	F32T8	F40T8	F17T8	F25T8	F32T8
LAMPS OPERATED	3			4		
INPUT WATTS	63	84	97	55	76	102
LINE CURRENT:	0.23	0.23	0.36	0.21	0.28	0.37
POWER FACTOR	0.97	0.98	0.98	0.95	0.97	0.98
BALLAST FACTOR	0.84	0.88	0.83	0.80	0.78	0.83
EFFICACY FACTOR	1.34	1.05	0.85	1.47	1.03	0.81
THD	9%	9%	9%	9%	9%	9%
CURRENT CREST FACTOR	< 1.7					
EMI/RFI COMPLIANCE	FCC PART 18-A					
SOUND RATING	" A "					
BALLAST TYPE	INSTANT START					
VOLTAGE TRANSIENTS	ANSI C82.11 - 1993					
INPUT/PROTECTION	FUSE					
OUTPUT/PROTECTION	-					
MIN. OPERATING TEMP	0 °C (32 ° F)					
MAX. CASE TEMP	75 °C (167 ° F)					
TYPE "HL" APPROVAL	APPROVED FOR HAZARDOUS LOCATION					
ENERGY STAR 4.0	-					
APPROVALS/CLASS	UL /cUL LISTED, CLASS " P ", 1 OUTDOOR					
REMOTE MOUNTING	18 FT MAX.					


MECHANICAL DATA

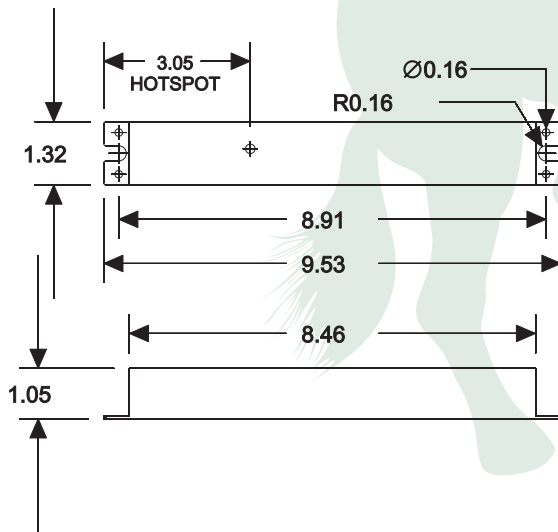

Where : L = Length, W = Width, H = Height

WIRING DIAGRAMS

WIRE	BLACK	WHITE	RED	BLUE	YELLOW	BROWN
LENGTH - INCHES	25 ± 1"	25 ± 1"	46 ± 1"	31 ± 1"		

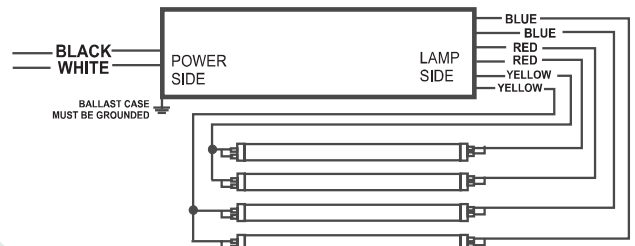

FOR THREE LAMP APPLICATION, CAP ONE BLUE WIRE INSULATE TO 600V.

NOTE : This Ballast Case Must Be Grounded

Fulham Co., Inc extends limited warranty only to the original purchaser or to the first user for the period of 5 years from the date of manufacture as indicated by the date code stamped on each product and when properly installed and under normal conditions of use. For additional warranty guide line, please refer to our Complete Product Catalog OR call Customer Service at 1-800-2-Fulham.

DUE TO A PROGRAM OF CONTINUOUS IMPROVEMENT, FULHAM Co., INC RESERVES THE RIGHT TO MAKE ANY VARIATION IN DESIGN OR CONSTRUCTION TO THE EQUIPMENT DESCRIBED.

Address : 12705 South Van Ness Ave., Hawthorne, CA 90250 Tel.: 1-800-2-fulham, Fax.: 1-323-754-9060. Website: www.fulham.com 02-2006-149-3 rev