

Technical Information

No. 5547

Edition: 04/10 - subject to change

Substitutes: 04/09

Status: valid

Xenon Short Arc Lamp

XBO[®] 6000 W/DHP OFR

■ Product description


The OSRAM XBO[®] 6000W/DHP OFR. is a DC-operated lamp, which has been developed with the latest high brightness technology for XBO lamps. A new generation of high light output lamps, especially designed for D-Cinema projector application. DHP lamps have a high degree of arc stability and a most superior level of luminance.

■ Technical data

Order reference	XBO [®] 6000 W/DHP OFR	
Rated lamp wattage	W	6000
Rated lamp voltage	V	35
Rated lamp current (DC)	A	170
Current control range	A	140 - 175
Ignition voltage	kV _p	40
Min. open circuit voltage for cold / hot ignition	V	85 / 110
Luminous flux	lm	280000
Luminous intensity	cd	30000
Average luminance	cd/cm ²	160000
Luminous area w x h *)	mm	1.9 x 6.0
Electrode gap e (cold)	mm	7.0
Lamp length (overall) l ₁	mm	max. 433
Lamp length l ₂	mm	max. 393
LCL a	mm	170,5
Bulb diameter d	mm	70
Service warranty**)	h	800
Warranty 100%	h	600
Base	Cathode:	SFa 30-7,9
Anode side cable 155mm	Anode:	SFa X 30-9,5

*) w = luminance half width value; h = height of luminance area (corresponds to electrode gap, hot)

**) Covers rupture effects in the projector, like reflector and first filter in front of the lamp.

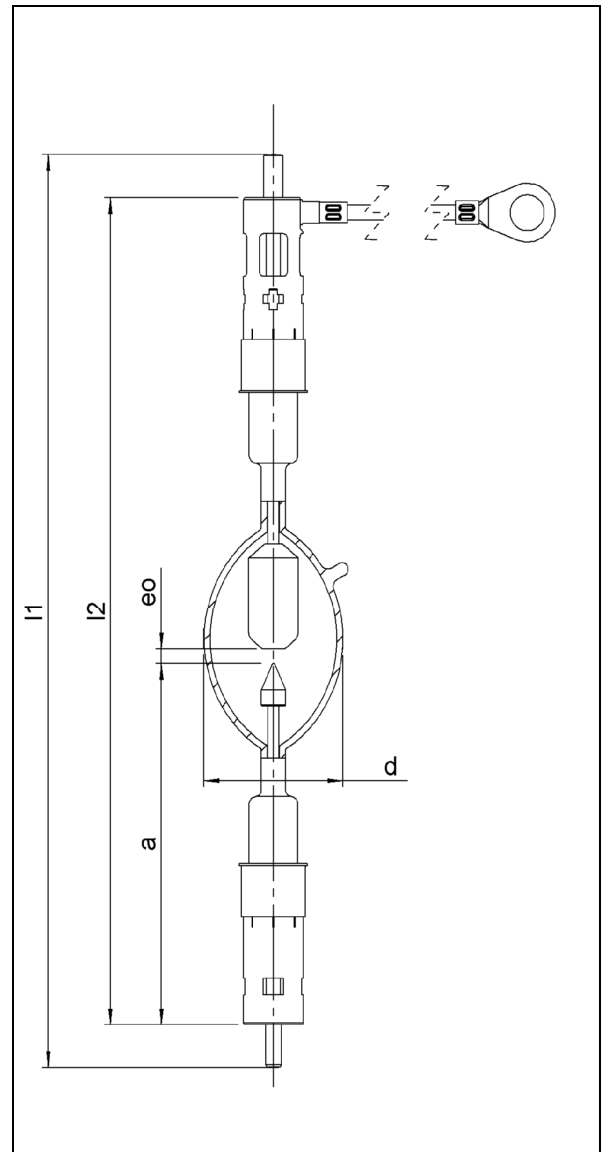

■ Lamp operation

Maximum permissible base temperature	230°C
Cooling	forced cooling / fan
Min. air flow velocity around discharge vessel	6 m/s
Magnetic arc stabilization	necessary for horizontal operation
Burning position	s 15 (vertical ± 15° ; anode up) ; p 15 (horizontal ± 15°)