Rev. D

#### **Features**

- Ultra High Efficiency (Up to 94.0%)
- Full Power at Wide Output Current Range (Constant Power)
- 0-5V/0-10V/PWM/Timer Dimmable
- Input Surge Protection: 6kV line-line, 10kV line-earth
- All-Around Protection: OVP, SCP, OTP
- Waterproof (IP67) and UL Dry / Damp / Wet Location
- SELV Output
- TYPE HL, for use in a Class I, Division 2 hazardous (Classified) location
- UL Type TL (Temperature Limited)
- 7 Years Warranty





#### **Description**

The *EUG-200SxxxDT* series is a 200W, constant-current, programmable LED driver that operates from 90-305 Vac input with excellent power factor. It is created for high bay, high mast, arena and roadway lights. The high efficiency of these drivers and compact metal case enables them to run cooler, significantly improving reliability and extending product life. To ensure trouble-free operation, protection is provided against input surge, output over voltage, short circuit, and over temperature.

#### **Models**


Adjustable Output			Typical			Model Number			
Current Range	Current Range (1)	Output Current	Voltage Range(2)	Voltage Output F Range Power		Efficiency (3)		220Vac	(4)
70-1050mA	700-1050mA	700 mA	90~305 Vac/ 127~300 Vdc		200W	94.0%	0.99	0.96	EUG-200S105DT
140-2100mA	1400-2100mA	1400 mA	90~305 Vac/ 127~300 Vdc	4X~14 3V/00	200W	94.0%	0.99	0.96	EUG-200S210DT
245-3500mA	2450-3500mA	2800 mA	90~305 Vac/ 127~300 Vdc	79 ~ A7VOC	200W	93.5%	0.99	0.96	EUG-200S350DT <sup>(5)</sup>
385-5600mA	3850-5600mA	4900 mA	90~305 Vac/ 127~300 Vdc	18 ~ 52Vac	200W	92.5%	0.99	0.96	EUG-200S560DT <sup>(5)</sup>


Notes: (1) Output current range with constant power at 200W

- (2) Certified voltage range: UL, FCC 100-277Vac or 127-300Vdc; otherwise 100-240Vac or 127-250Vdc (except KS)
- (3) Measured at full load and 220Vac input (see below "General Specifications" for details).
- (4) All the models are certificated to KS, except EUG-200S105DT
- (5) SELV Output.

Rev. D




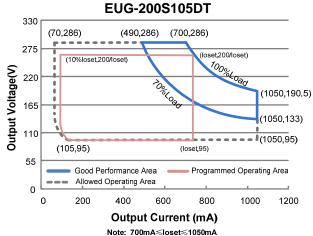

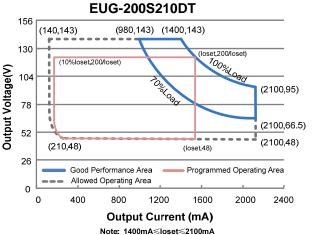

EUG-200S350DT 96 (1715,82) (2450,82) 80 (loset,200/loset) Output Voltage(V) 100%Load 64 (3500,57) 48 (3500,40) 32 (3500,29) (loset,29) (350,29)16 Good Performance Area Programmed Operating Area Allowed Operating Area 0 0 1950 3900 650 2600 3250 **Output Current (mA)** 

Note: 2450mA≤loset≤3500mA

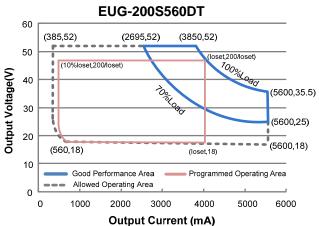

Note: 3850mA≤loset≤5600mA

#### Input Specifications

nput specifications						
Parameter	Min.	Тур.	Max.	Notes		
Input Voltage	90 Vac	-	305 Vac	127~300 Vdc		
Input Frequency	47 Hz	-	63 Hz			
Lookaga Current	-	-	0.75 MIU	UL8750; 277Vac/ 60Hz		
Leakage Current	-	-	0.70 mA	IEC60598-1; 240Vac/ 60Hz		
Innut AC Current	-	-	2.64 A	Measured at full load and 100 Vac input.		
Input AC Current	-	-	1.20 A	Measured at full load and 220 Vac input.		
Inrush Current(I <sup>2</sup> t)	-	-	2.65 A <sup>2</sup> s	At 220Vac input, 25°C cold start, duration=1.36 ms, 10%lpk-10%lpk. See Inrush Current Waveform for the details.		
PF	0.9	-	-	At 100-277Vac, 50-60Hz, 70%-100% Load		
THD	-	-	20%	(140-200W)		
THD	-	-	10%	At 220-240Vac, 50-60Hz, 75%-100% Load (150-200W)		

2/14

Rev. D

**Output Specifications** 

Parameter	Min.	Тур.	Max.	Notes
Output Current Tolerance	-5%loset	-	5%loset	At full load condition
Output Current Setting(loset) Range				
EUG-200S105DT EUG-200S210DT EUG-200S350DT EUG-200S560DT	70 mA 140 mA 245 mA 385 mA	- - -	1050 mA 2100 mA 3500 mA 5600 mA	
Output Current Setting Range with Constant Power EUG-200S105DT EUG-200S210DT EUG-200S350DT	700 mA 1400 mA 2450 mA	- - -	1050 mA 2100 mA 3500 mA	
EUG-200S560DT	3850 mA	-	5600 mA	
Total Output Current Ripple (pk-pk)	-	5%lomax	10%lomax	At full load condition. 20 MHz BW
Output Current Ripple at < 200 Hz (pk-pk)	1	2%lomax	-	At full load condition. Only this component of ripple is associated with visible flicker.
Startup Overshoot Current	-	-	10%lomax	At full load condition
No Load Output Voltage EUG-200S105DT EUG-200S210DT EUG-200S350DT EUG-200S560DT		- - -	330 V 170 V 95 V 60 V	
Line Regulation	-	-	±0.5%	Measured at full load
Load Regulation	-	-	±1.5%	
Turn on Dolov Time	-	-	1.0 s	Measured at 120Vac input, 70%-100% Load
Turn-on Delay Time	-	-	0.5 s	Measured at 220Vac input, 70%-100% Load
Temperature Coefficient of loset	-	0.03%/°C	-	Case temperature = 0°C ~Tc max
12V Auxiliary Output Voltage	10.8 V	12 V	13.2 V	
12V Auxiliary Output Source Current	0 mA	-	20 mA	Return terminal is "Dim-"

**Note:** All specifications are typical at 25°C unless otherwise stated.

#### **General Specifications**

Parameter	Min.	Тур.	Max.	Notes
Efficiency at 120 Vac input: EUG-200S105DT Io= 700mA	89.0%	91.0%	_	
lo=1050mA EUG-200S210DT	88.0%	90.0%	-	
lo=1400mA lo=2100mA EUG-200S350DT	89.5% 88.0%	91.5% 90.0%	-	Measured at full load and steady-state temperature in 25°C ambient; (Efficiency will be about 2.0% lower if
lo=2450mA lo=3500mA	88.5% 87.0%	90.5% 89.0%	- -	measured immediately after startup.)
EUG-200S560DT lo=3850mA lo=5600mA	88.0% 87.0%	90.0% 89.0%	<u>-</u>	

3/14

Fax: 86-571-86601139

Rev. D

**General Specifications (Continued)** 

Seneral Specifications	Continue	<u>'</u>			
Parameter	Min.	Тур.	Max.	Notes	
Efficiency at 220 Vac input: EUG-200S105DT					
Io= 700mA	92.0%	94.0%	-		
Io=1050mA	91.0%	93.0%	-		
EUG-200S210DT				Measured at full load and steady-state	
Io=1400mA	92.0%	94.0%	-	temperature in 25°C ambient;	
Io=2100mA	90.5%	92.5%	-	(Efficiency will be about 2.0% lower if	
EUG-200S350DT				measured immediately after startup.)	
Io=2450mA	91.5%	93.5%	-	measured inimediately after startup.	
Io=3500mA	89.5%	91.5%	-		
EUG-200S560DT	00.50/	00.50/			
Io=3850mA	90.5%	92.5%	-		
Io=5600mA	89.5%	91.5%	ı		
Efficiency at 277 Vac input: EUG-200S105DT					
Io= 700mA	92.5%	94.5%	-		
Io=1050mA	91.5%	93.5%	-		
EUG-200S210DT				Measured at full load and steady-state	
Io=1400mA	92.5%	94.5%	-	temperature in 25°C ambient;	
Io=2100mA	91.0%	93.0%	-	(Efficiency will be about 2.0% lower if	
EUG-200S350DT					
Io=2450mA	91.5%	93.5%	-	measured immediately after startup.)	
Io=3500mA	90.0%	92.0%	-		
EUG-200S560DT					
Io=3850mA	91.0%	93.0%	-		
Io=5600mA	90.0%	92.0%	-		
MTBF	-	230,000 Hours	-	Measured at 220Vac input, 80%Load and 25°C ambient temperature (MIL-HDBK-217F)	
Lifetime	-	95,000 Hours	-	Measured at 220Vac input, 80%Load and 70°C case temperature; See lifetime vs. Tc curve for the details	
Operating Case Temperature for Safety Tc_s	-40°C	-	+90°C		
Operating Case Temperature for Warranty Tc_w	-40°C	-	+75°C	Case temperature for 7 years warranty.  Please see Inventronics Warranty  Statement for complete details.	
Operating Case Temperature for Type TL Tc_TL	-40°C	-	+83°C		
Storage Temperature	-40°C		+85°C	Humidity: 5%RH to 100%RH	
Dimensions Inches (L × W × H) Millimeters (L × W × H)		.87 × 2.66 × 1.5 00 × 67.5 × 39.		With mounting ear 8.70 × 2.66 × 1.56 221 × 67.5 × 39.7	
Net Weight	-	1180 g	-	22. 01.0 00	
=	1				

**Note**: All specifications are typical at 25°C unless otherwise stated.

Rev. D

# **Dimming Specifications**

F	Parameter	Min.	Тур.	Max.	Notes
Absolute Maximum Voltage on the Vdim (+) Pin		-20 V	-	20 V	
Source Cu (+)Pin	rrent on Vdim	200 uA	300 uA	450 uA	Vdim(+) = 0 V
EUG-200S105DT EUG-200S210DT EUG-200S350DT Dimming EUG-200S560DT		10%loset	-	loset	700 mA ≤ loset ≤ 1050 mA 1400 mA ≤ loset ≤ 2100 mA 2450 mA ≤ loset ≤ 3500 mA 3850 mA ≤ loset ≤ 5600 mA
Output Range	EUG-200S105DT EUG-200S210DT EUG-200S350DT EUG-200S560DT	70 mA 140 mA 245 mA 385 mA	-	loset	70 mA ≤ loset < 700 mA 140 mA ≤ loset < 1400 mA 245 mA ≤ loset < 2450 mA 385 mA ≤ loset < 3850 mA
	Recommended Dimming Range for 0-5V		-	5 V	Dimming mode set to 0-5V in PC interface.
Recommended Dimming Range for 0-10V		0 V	-	10 V	Default 0-10V dimming mode with positive logic.
PWM_in H	PWM_in High Level		-	10 V	
PWM_in Low Level		-0.3 V	-	0.6 V	Dimming mode set to DWM in DC interfece
PWM_in Frequency Range		200 Hz	-	2 KHz	Dimming mode set to PWM in PC interface.
PWM_in D	Outy Cycle	1%	-	99%	

#### **Safety &EMC Compliance**

Safety Category	Standard
UL/CUL	UL8750,CAN/CSA-C22.2 No. 250.13
CE	EN 61347-1, EN61347-2-13
KS	KS C 7655
EMI Standards	Notes
EN 55015 <sup>(1)</sup>	Conducted emission Test &Radiated emission Test
EN 61000-3-2	Harmonic current emissions
EN 61000-3-3	Voltage fluctuations & flicker
	ANSI C63.4 Class B
FCC Part 15 <sup>(1)</sup>	This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: [1] this device may not cause harmful interference, and [2] this device must accept any interference received, including interference that may cause undesired Operation.

Rev. D


Safety &EMC Compliance (Continued)

EMS Standards	Notes
EN 61000-4-2	Electrostatic Discharge (ESD): 8 kV air discharge, 4 kV contact discharge
EN 61000-4-3	Radio-Frequency Electromagnetic Field Susceptibility Test-RS
EN 61000-4-4	Electrical Fast Transient / Burst-EFT
EN 61000-4-5	Surge Immunity Test: AC Power Line: line to line 6 kV, line to earth 10 kV <sup>(2)</sup>
EN 61000-4-6	Conducted Radio Frequency Disturbances Test-CS
EN 61000-4-8	Power Frequency Magnetic Field Test
EN 61000-4-11	Voltage Dips
EN 61547	Electromagnetic Immunity Requirements Applies To Lighting Equipment

**Note**: (1) This LED driver meets the EMI specifications above, but EMI performance of a luminaire that contains it depends also on the other devices connected to the driver and on the fixture itself.

(2) To perform electric strength (hi-pot) testing, the "GDT ground disconnect" (nut and metal lock sheet) on the driver end-cap should be removed temporarily to prevent the internal gas discharge tube from conducting (as allowed by IEC 60598-1 Clause 10.2). After testing is completed, these items must be reinstalled to restore line-to-earth surge protection and secure the end cap.


### Lifetime vs. Case Temperature

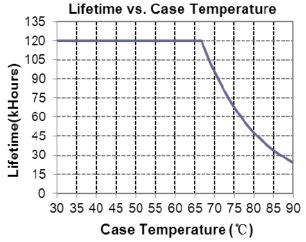


# **INVENTRONICS**


Rev. D


#### **Inrush Current Waveform**

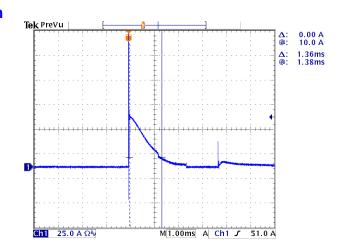


#### Efficiency vs. Load

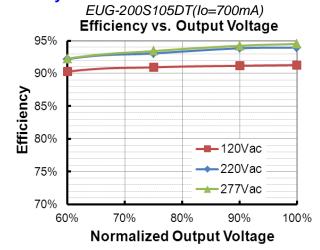

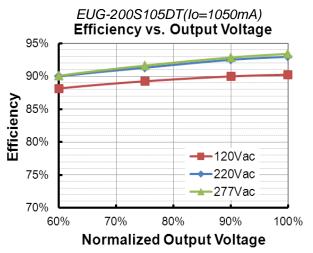


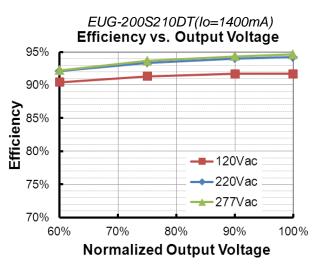

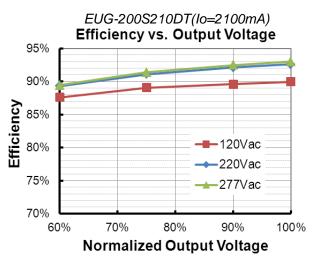


7/14

Rev. D

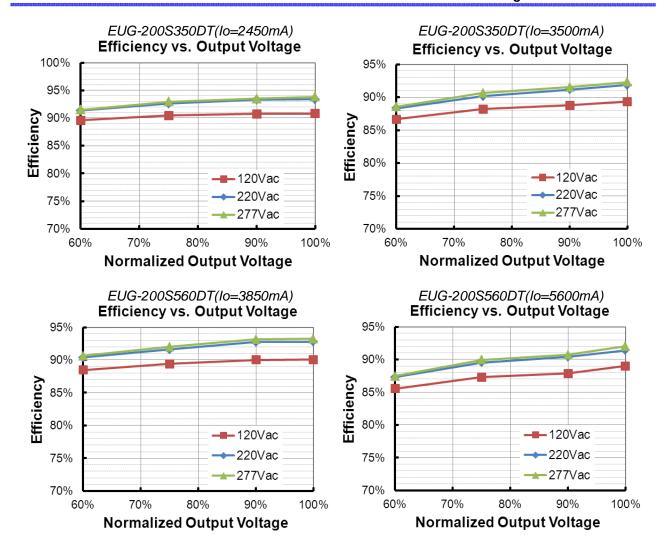

#### **Power Factor**

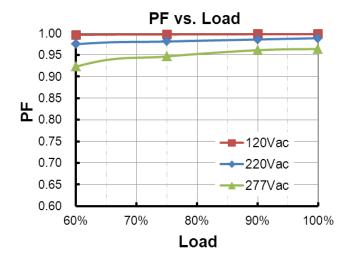


8/14

# **INVENTRONICS**

Rev. D

#### **Total Harmonic Distortion**

**EUG-200SxxxDT** 

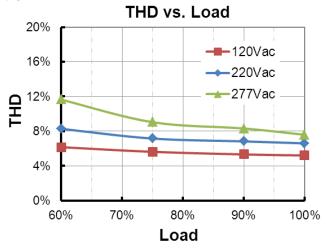


#### **Protection Functions**

Parameter	Notes			
Over Temperature Protection	Decreases output current, returning to normal after over temperature is removed.			
Short Circuit Protection	Auto Recovery. No damage will occur when any output is short circuited. The output shall return to normal when the fault condition is removed.			
Over Voltage Protection	Limits output voltage at no load and in case the normal voltage limit fails.			

### **Dimming**


#### 0-5V Dimming

The recommended implementation of the dimming control is provided below.

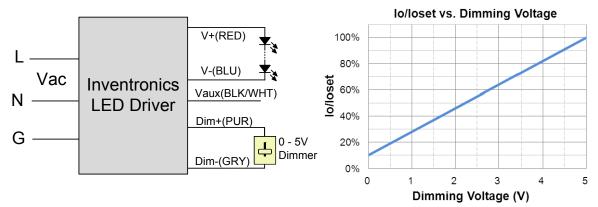

Implementation 1: Positive logic

**INVENTRONICS** 

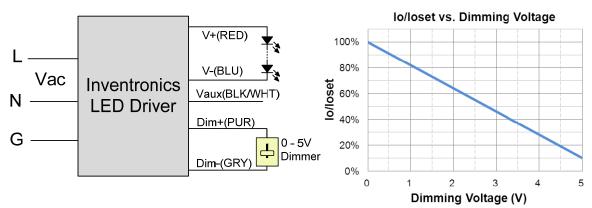


Implementation 2: Negative logic

#### Notes:


- The dimmer can also be replaced by an active 0-5V voltage source signal or passive components like resistors and zener.
- 2. Do NOT connect Dim- to the output V- or V+, otherwise the driver will not work properly.
- 3. If 0-5V dimming is not used, Dim + should be open.
- 4. When 0-5V negative logic dimming mode and Dim+ is open, the driver will output maximum current.

#### 0-10V Dimming

The recommended implementation of the dimming control is provided below.

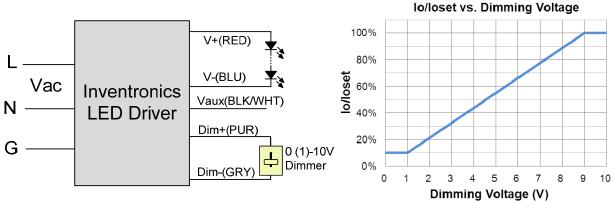

Implementation 3: Positive logic

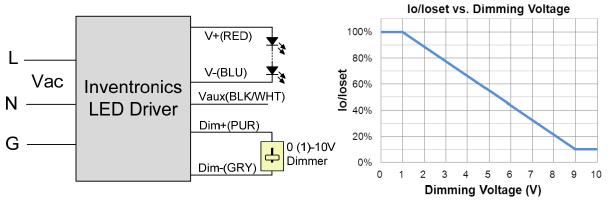

Implementation 4: Negative logic

10/14


Fax: 86-571-86601139

Rev. D


#### Notes:

- The dimmer can also be replaced by an active 0-10V voltage source signal or passive components like resistors and zener.
- Do NOT connect Dim- to the output V- or V+, otherwise the driver will not work properly.
- 3. If 0-10V dimming is not used, Dim + should be open.
- 4. When 0-10V negative logic dimming mode and Dim+ is open, the driver will output minimum current.

#### PWM Dimming

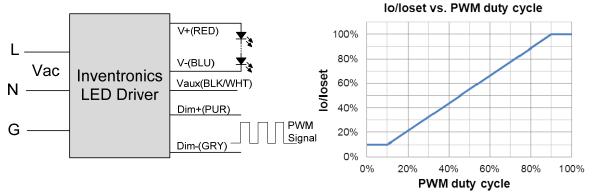

Implementation 5: Positive logic

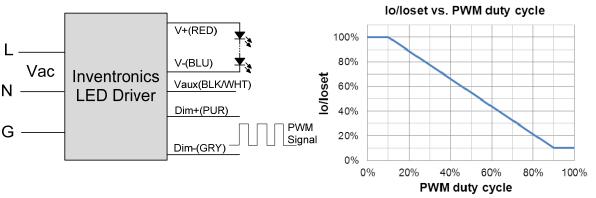


Implementation 6: Negative logic

#### Notes:


- 1. Do NOT connect Dim- to the output V- or V+, otherwise the driver will not work properly.
- 2. If PWM dimming is not used, Dim + should be open.
- 3. When PWM negative logic dimming mode and Dim+ is open, the driver will output minimum current.

**Time Dimming** 

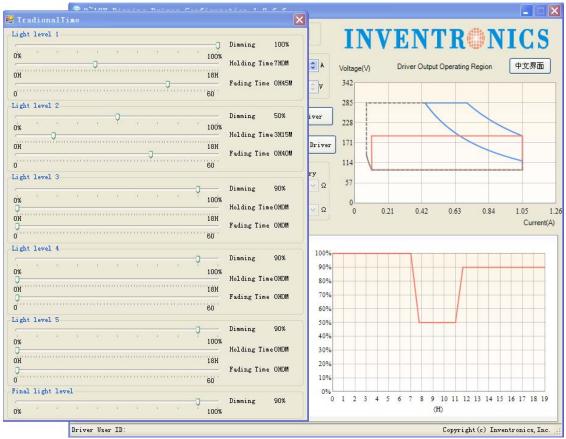

Set the timing curve by pulling the sliders.

# **Programming Connection Diagram**

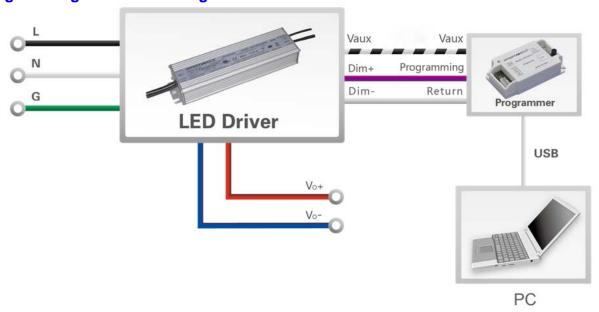

12 / 14


Fax: 86-571-86601139

Rev. D

Note: The driver does not need to be powered on during the programming process.

Please refer to PRG-MUL2 (Programmer) datasheet for details.

#### **Mechanical Outline**

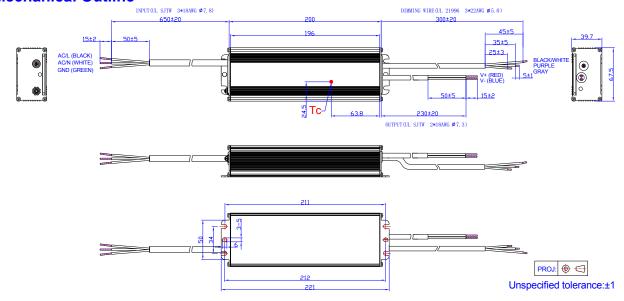

## **RoHS Compliance**

Our products comply with the European Directive 2011/65/EC, calling for the elimination of lead and other hazardous substances from electronic products.



Rev. D

**Revision History** 

Change	_	Description of Change							
Date	Rev.	Item	From	То					
2016-01-05	Α	Datasheets Release	/	/					
		Features	/	Updated					
		General Specifications	Operating Case Temperature for Type TL Tc_TL	Added					
2016-04-07	В	General Specifications	With mounting ear	Added					
		General Specifications	Net Weight	Updated					
		Safety &EMC Compliance	/	Updated					
		Mechanical Outline	/	Updated					
	С	Features	/	Updated					
		Models	/	Updated					
		Input Specifications	PF/THD	Updated					
2017-08-02		Temperature Coefficient of loset	/	Updated					
		Dimensions	/	Updated					
		Safety &EMC Compliance	/	Updated					
		Mechanical Outline	/	Updated					
	_	Features	7 Years Warranty	Added					
2017-10-26	D	Operating Case Temperature for Warranty Tc_w	/	Updated					