


FHEX24



Aluminum LED Edgelit Exit Sign

 Push- to- test switch LED charge indicator AC and EM models Field applied chevron directional indicators Maintenance-free, 6V sealed lead-acid battery 	 Universal mount Energy saving LED lamp source Dual voltage 120V/277V UL Listed in accordance with UL924 High-Polish, injection-molded acrylic panel, welded to eliminate visible hardware 	
eneral Specifications	FHEX24 (Red)	FHEX24 (Green)
Input Voltage	120/277VAC	120/277VAC
Input Current (120V)	148mA	148mA
Input Current (277V)	133mA	131mA
Input Power (120V)	3.2W	3.8W
Input Power (277V)	3.0W	2.8W
Operating Frequency	60Hz	
Operating Ambient Temperature Range (Ta)	0°C to 50°C / 32°F to 122°F	
Overall Size	12.75" L x 11" H	
Emergency Operation	90 minutes	
Compliance	UL 924 Listed	
	Damp Location	
Warranty	5 years from the date of manufacture	

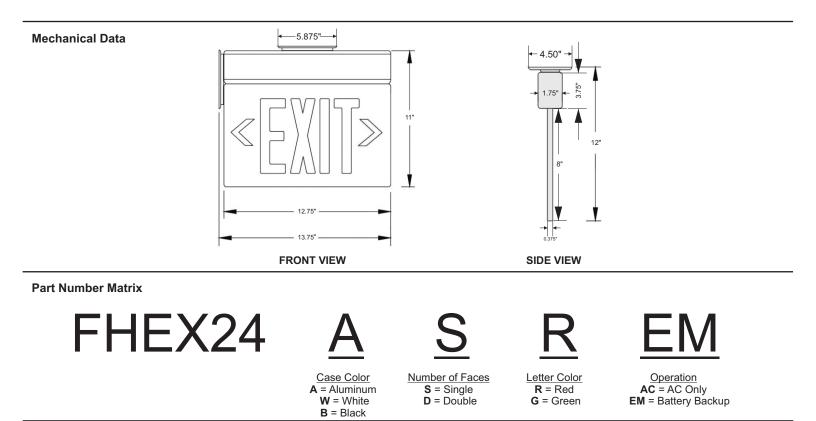

Fulham Co. Inc.: 12705 South Van Ness Ave., Hawthorne, CA 90250 Tel.: 1-323-779-2980 Fax.: 1-323-754-9060. order@fulham.com www.fulham.com Specifications subject to change without notice.