

Presented By: Candela Corporation
Contact Phone: (800) 922-9226
Contact E-mail: sales@candelacorp.com


Customer Name:
Project Name:
Fixture Type:



GE
Lighting

43698 - Q250CL/DC

GE T4

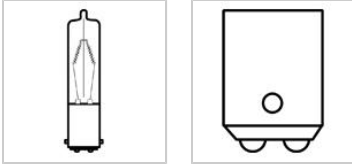

CAUTIONS & WARNINGS

Caution

- Risk of Burn
 - Allow lamp to cool before handling.
 - Turn power off before installing lamp.
- Lamp may shatter and cause injury if broken
 - Dispose of lamp in a closed container.
 - Do not use lamp if outer glass is scratched or broken.

Warning

- Risk of Electric Shock
 - Turn power off before inspection, installation or removal.
- Risk of Fire
 - Keep combustible materials away from lamp.
 - Use in enclosed fixture rated for this product.
- Lamp emits UV radiation which may cause eye/skin irritation.
 - Avoid exposure of eyes and skin to unshielded lamp.
- Unexpected lamp rupture may cause injury, fire, or property damage
 - Use eye protection when handling lamp.
 - Use in enclosed fixture rated for this product.
 - Do not touch glass with bare hands.
 - Do not use lamp if outer glass is scratched or broken.
 - Do not exceed 110% of rated voltage.

GENERAL CHARACTERISTICS

Lamp Type	Halogen - Single-Ended
Bulb	T4
Base	Double Contact Bayonet (BA15d)
Filament	CC-8
Bulb Finish	Clear
Wattage	250
Voltage	130/120
Rated Life	2000 hrs

PHOTOMETRIC CHARACTERISTICS

Initial Lumens	5000
Color Temperature	2950 K
Nominal Initial Lumens per Watt	20

DIMENSIONS

Maximum Overall Length (MOL)	3.0000 in(76.2 mm)
Bulb Diameter (DIA)	0.500 in(12.7 mm)
Bulb Diameter (DIA) (MAX)	0.500 in(12.7 mm)
Light Center Length (LCL)	1.625 in(41.3 mm)

PRODUCT INFORMATION

Product Code	43698
Description	Q250CL/DC
Standard Package	Case
Standard Package GTIN	10043168436981
Standard Package Quantity	6
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	6
UPC	043168436984