

T5

10T5HE/COR/34-835/MF13/G 25/1

Philips MainsFit (Type B) T5 LED tubes offer an affordable, energy saving retrofit solution to replace fluorescent T5 HE lamps. The double-ended design makes for a quick and simple installation. Our lamps have been engineered to withstand the test of time with a 50,000-hour lifetime and a limited 5-year warranty to back it up.

Product data


General information		Warm Up Time to 60% Light (Nom)	
Base	G5 [G5]		0.5 s
EU RoHS compliant	Yes	UL Type	TLED_Type B; UL classified double end
Nominal Lifetime (Nom)	50000 h	Power Factor (Nom)	0.9
Switching Cycle	50000X	Voltage (Nom)	120-277 V
Light technical		Temperature	
Color Code	835 [CCT of 3500K]	T-Ambient (Max)	45 °C
Beam Angle (Nom)	200 °	T-Ambient (Min)	-20 °C
Initial lumen (Nom)	1300 lm	T-Storage (Max)	65 °C
Color Designation	White (WH)	T-Storage (Min)	-40 °C
Correlated Color Temperature (Nom)	3500 K	T-Case Maximum (Nom)	70 °C
Luminous Efficacy (rated) (Nom)	130.00 lm/W	Controls and dimming	
Color Consistency	<6	Dimmable	Limited
Color Rendering Index (Nom)	80	Mechanical and housing	
LLMF At End Of Nominal Lifetime (Nom)	70 %	Bulb Finish	Frosted
Operating and electrical		Bulb Material	Glass
Input Frequency	50 to 60 Hz	Product Length	36 in
Power (Rated) (Nom)	10 W	Bulb Shape	Tube, double-ended
Lamp Current (Max)	105 mA	Approval and application	
Lamp Current (Min)	40 mA	Energy Saving Product	Yes
Starting Time (Nom)	0.5 s		

T5

Approbation Marks	RoHS compliance UL certificate
Product data	
Order product name	10T5HE/COR/34-835/MF13/G 25/1
EAN/UPC - Product	046677576172
Order code	576173
Numerator - Quantity Per Pack	1

Numerator - Packs per outer box	25
Material Nr. (12NC)	929003123004
Net Weight (Piece)	0.125 kg
Model Number	9290031230


Dimensional drawing

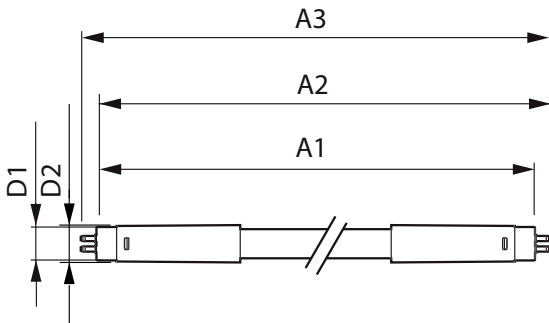


10T5HE/COR/34-835/MF13/G 25/1

Product
10T5HE/COR/34-835/MF13/G 25/1


Photometric data



LEDtube COR NAM1 8W G5 1000lm-LDD





LEDtube COR NAM1 10W G5 1300lm 835-GUL

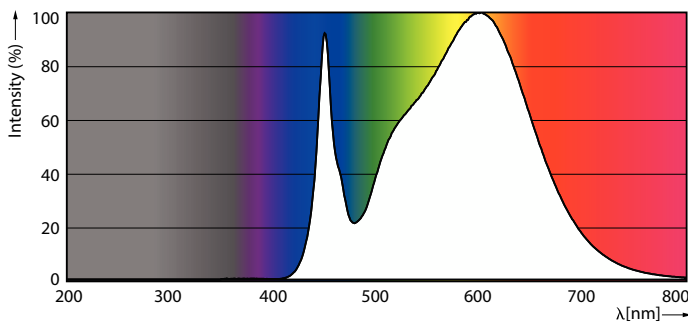



LEDtube COR NAM1 8W G5 1000lm 835-POC

Lifetime

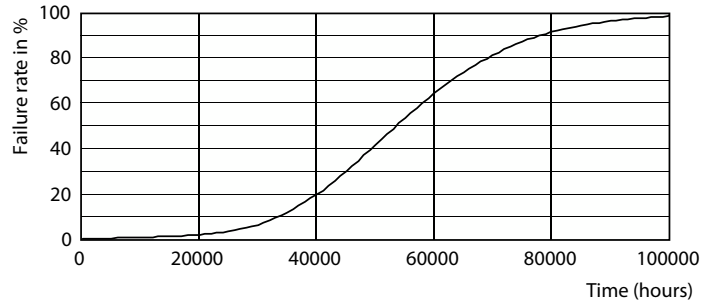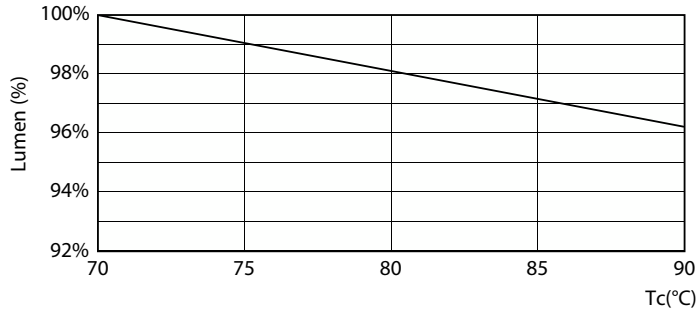


LEDtube COR NAM1 8W 50K LumenVsTc-LMP

LEDtube 50K-LED

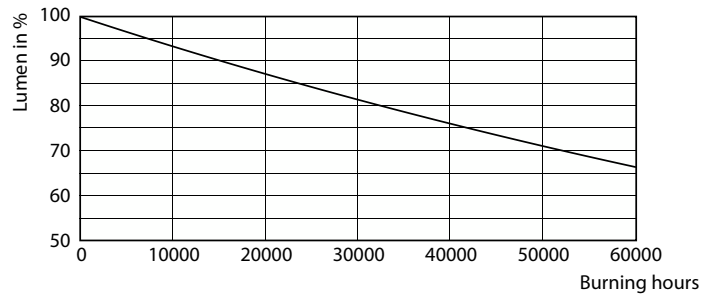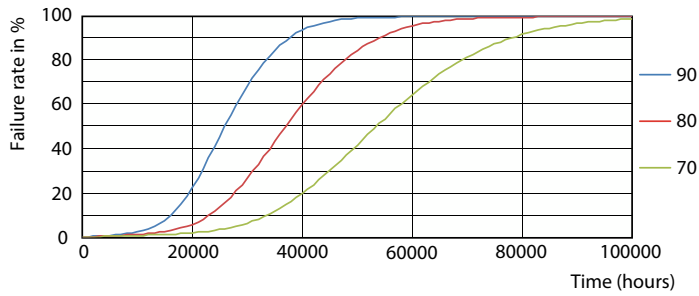

LEDtube 50K 7090 FailureRate-LED

LEDtube 50K-LMP

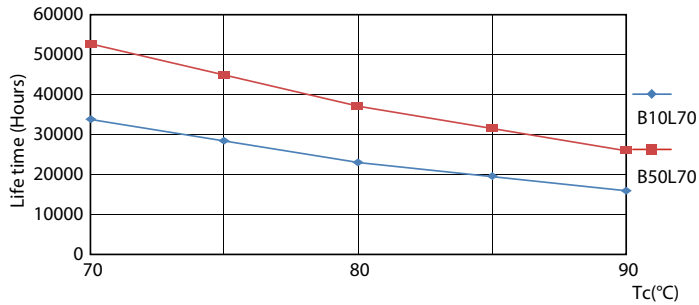

LEDtube 50K 7090 LifetimeVsTc-LED

