

|               |       |
|---------------|-------|
| Project Name: | Type: |
| Part Number:  | Date: |

# VERSA FILAMENT SERIES

## FEATURES

- Suitable to replace 25W, 40W, 60W and 75W incandescent
- High CRI and R values (R9 50, R13 95) deliver richer reds and natural skin tones
- Full glass construction
- Provides an excellent option for energy savings in any fixtures
- Available in 2700K, 3000K, 4000K and 5000K color temperatures
- 320° omnidirectional beam angle
- Smooth dimming with most forward and reverse phase controls \*
- Suitable for use in totally enclosed fixtures
- Suitable for use in wet locations
- Wider fixture operating temperature: -13°F to 113°F (-25°C to 45°C) \*\*
- Rated Lifetime (L70): 25,000hrs for Candle series, 15,000hrs for A19 series
- 3 year limited warranty \*\*\*



## SPECIFICATIONS

| Product | Model                   | Equiv. | CCT   | Finish  | Wattage (W) | Lumens (LM) | Efficacy (LPW) | Power Factor | Input Voltage | CRI | Beam Angle | Dim.* | UL Location | Fixture Rating | T20  | JA8  | DOE  |
|---------|-------------------------|--------|-------|---------|-------------|-------------|----------------|--------------|---------------|-----|------------|-------|-------------|----------------|------|------|------|
| 36747   | 9FA19DIM/927/RC         | 60W    | 2700K | Clear   | 9           | 820         | 91             | ≥0.7         | 120V          | 92  | 320°       | YES   | Wet         | Enclosed       | ✓    | N.A. | ✓    |
| 36748   | 9FA19DIM/930            | 60W    | 3000K | Clear   | 9           | 820         | 91             | ≥0.7         | 120V          | 92  | 320°       | YES   | Wet         | Enclosed       | ✓    | N.A. | ✓    |
| 36749   | 9FA19DIM/940            | 60W    | 4000K | Clear   | 9           | 850         | 94             | ≥0.7         | 120V          | 92  | 320°       | YES   | Wet         | Enclosed       | ✓    | N.A. | ✓    |
| 36750   | 9FA19DIM/950            | 60W    | 5000K | Clear   | 9           | 850         | 94             | ≥0.7         | 120V          | 92  | 320°       | YES   | Wet         | Enclosed       | ✓    | N.A. | ✓    |
| 36752   | 10FA19DIM/930           | 75W    | 3000K | Clear   | 10          | 1,150       | 115            | ≥0.9         | 120V          | 92  | 320°       | YES   | Wet         | Enclosed       | ✓    | ✓    | ✓    |
| 36753   | 10FA19DIM/940           | 75W    | 4000K | Clear   | 10          | 1,200       | 120            | ≥0.9         | 120V          | 92  | 320°       | YES   | Wet         | Enclosed       | ✓    | ✓    | ✓    |
| 37056   | 2FB11DIM/927            | 25W    | 2700K | Clear   | 2           | 200         | 100            | ≥0.7         | 120V          | 92  | 320°       | YES   | Wet         | Enclosed       | ✓    | N.A. | N.A. |
| 37057   | 2FB11DIM/927/E26        | 25W    | 2700K | Clear   | 2           | 200         | 100            | ≥0.7         | 120V          | 92  | 320°       | YES   | Wet         | Enclosed       | ✓    | N.A. | N.A. |
| 37058   | 3.3FB11DIM/927/RC       | 40W    | 2700K | Clear   | 3.3         | 300         | 91             | ≥0.7         | 120V          | 92  | 320°       | YES   | Wet         | Enclosed       | ✓    | N.A. | N.A. |
| 37059   | 3.3FB11DIM/927/FR/RC    | 40W    | 2700K | Frosted | 3.3         | 300         | 91             | ≥0.7         | 120V          | 92  | 320°       | YES   | Wet         | Enclosed       | ✓    | N.A. | N.A. |
| 37061   | 3.3FB11DIM/820/A        | 40W    | 2000K | Amber   | 3.3         | 240         | 79             | ≥0.7         | 120V          | 82  | 320°       | YES   | Wet         | Enclosed       | N.A. | N.A. | N.A. |
| 37062   | 3.3FBA11DIM/820/FT/A/RC | 40W    | 2000K | Amber   | 3.3         | 240         | 79             | ≥0.7         | 120V          | 82  | 320°       | YES   | Wet         | Enclosed       | N.A. | N.A. | N.A. |
| 37063   | 5.5FB11DIM/927/RC       | 60W    | 2700K | Clear   | 5.5         | 500         | 91             | ≥0.7         | 120V          | 92  | 320°       | YES   | Wet         | Enclosed       | ✓    | N.A. | ✓    |
| 37065   | 5.5FB11DIM/927/E26/RC   | 60W    | 2700K | Clear   | 5.5         | 500         | 91             | ≥0.7         | 120V          | 92  | 320°       | YES   | Wet         | Enclosed       | ✓    | N.A. | ✓    |

\*This lamp might not be compatible with all dimmers. Please visit [www.greencreative.com](http://www.greencreative.com) for compatibility information.

\*\* Fixture operating temperature for A19 series: -13°F to 113°F (-25°C to 45°C). For Candle series, fixture operating temperature -13°F to 95°F (-25°C to 35°C) and lamp ambient temperature: -13°F to 113°F (-25°C to 45°C).

\*\*\* Please visit [www.greencreative.com](http://www.greencreative.com) for Limited Warranty terms.


|               |       |
|---------------|-------|
| Project Name: | Type: |
| Part Number:  | Date: |




GREENCREATIVE

# VERSA FILAMENT SERIES


## DIMENSION & WEIGHT




| Model           | Base | MOL     | Dia.   | Weight  |
|-----------------|------|---------|--------|---------|
| 9FA19DIM/xxx/RC | E26  | 4-3/16" | 2-3/8" | 0.07 lb |
| 9FA19DIM/xxx    | E26  | 4-3/16" | 2-3/8" | 0.07 lb |
| 10FA19DIM/xxx   | E26  | 4-3/16" | 2-3/8" | 0.07 lb |



| Model                | Base | MOL      | Dia.   | Weight  |
|----------------------|------|----------|--------|---------|
| 2FB11DIM/xxx         | E12  | 3-13/16" | 1-3/8" | 0.03 lb |
| 3.3FB11DIM/xxx/RC    | E12  | 3-13/16" | 1-3/8" | 0.03 lb |
| 3.3FB11DIM/xxx/FR/RC | E12  | 3-13/16" | 1-3/8" | 0.03 lb |
| 3.3FB11DIM/xxx/A     | E12  | 3-13/16" | 1-3/8" | 0.03 lb |
| 5.5FB11DIM/9xx/RC    | E12  | 3-13/16" | 1-3/8" | 0.03lb  |



| Model                 | Base | MOL     | Dia.   | Weight  |
|-----------------------|------|---------|--------|---------|
| 2FB11DIM/9xx/E26      | E26  | 3-9/16" | 1-3/8" | 0.04 lb |
| 5.5FB11DIM/9xx/E26/RC | E26  | 3-9/16" | 1-3/8" | 0.04 lb |

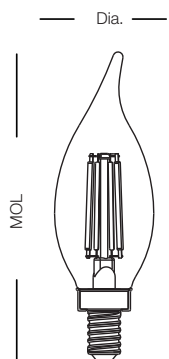

| Model                   | Base | MOL    | Dia.   | Weight |
|-------------------------|------|--------|--------|--------|
| 3.3FBA11DIM/xxx/FT/A/RC | E12  | 4-3/8" | 1-3/8" | 0.03lb |

|               |       |
|---------------|-------|
| Project Name: | Type: |
| Part Number:  | Date: |



GREENCREATIVE

# VERSA FILAMENT SERIES

## ORDERING INFORMATION

| Model                   | Master Carton |                            |             | Shipping Carton |                              |             |
|-------------------------|---------------|----------------------------|-------------|-----------------|------------------------------|-------------|
|                         | Case Qty      | Case Dimensions (LxWxH)    | Case Weight | Case Qty        | Case Dimensions (LxWxH)      | Case Weight |
| 9FA19DIM/xxx/RC         | 6PCS          | 8-1/4" x 5-11/16" x 5-1/8" | 0.93 lb     | 24PCS           | 17-1/8" x 12" x 6-5/16"      | 4.63 lb     |
| 9FA19DIM/xxx            | 6PCS          | 8-1/4" x 5-11/16" x 5-1/8" | 0.93 lb     | 24PCS           | 17-1/8" x 12" x 6-5/16"      | 4.63 lb     |
| 10FA19DIM/xxx           | 6PCS          | 8-1/4" x 5-11/16" x 5-1/8" | 0.93 lb     | 24PCS           | 17-1/8" x 12" x 6-5/16"      | 4.63 lb     |
| 2FB11DIM/xxx            | 6PCS          | 5-1/16" x 3-3/8" x 4-3/4"  | 0.39lb      | 24PCS           | 10-1/2" x 7-5/16" x 5-5/16"  | 1.94lb      |
| 2FB11DIM/xxx/E26        | 6PCS          | 5-1/16" x 3-3/8" x 4-3/4"  | 0.43lb      | 24PCS           | 10-1/2" x 7-5/16" x 5-5/16"  | 2.10lb      |
| 3.3FB11DIM/xxx/RC       | 6PCS          | 5-1/16" x 3-3/8" x 4-3/4"  | 0.39lb      | 24PCS           | 10-1/2" x 7-5/16" x 5-5/16"  | 1.94lb      |
| 3.3FB11DIM/xxx/FR/RC    | 6PCS          | 5-1/16" x 3-3/8" x 4-3/4"  | 0.39lb      | 24PCS           | 10-1/2" x 7-5/16" x 5-5/16"  | 1.94lb      |
| 3.3FB11DIM/xxx/A        | 6PCS          | 5-1/16" x 3-3/8" x 4-3/4"  | 0.39lb      | 24PCS           | 10-1/2" x 7-5/16" x 5-5/16"  | 1.94lb      |
| 5.5FB11DIM/xxx/E26/RC   | 6PCS          | 5-1/16" x 3-3/8" x 4-3/4"  | 0.47lb      | 24PCS           | 10-1/2" x 7-5/16" x 5-5/16"  | 2.24lb      |
| 3.3FBA11DIM/820/FT/A/RC | 6PCS          | 5-1/16" x 3-3/8" x 5-1/8"  | 0.39lb      | 24PCS           | 10-1/2" x 7-5/16" x 5-15/16" | 1.94lb      |
| 5.5FB11DIM/927/RC       | 6PCS          | 5-1/16" x 3-3/8" x 4-3/4"  | 0.43lb      | 24PCS           | 10-1/2" x 7-5/16" x 5-5/16"  | 2.07lb      |

Where xxx means 824-965 which indicates CRI and color temperature

Note: All rights reserved. All sizes and specifications are subject to change at any time without notice.