


Project Name:	Type:
Part Number:	Date:

CCT SELECT A LAMP

FEATURES

- Suitable to replace 60W, 75W and 100W incandescent lamps
- Superior light efficacy up to 132 LPW
- Option for 120-277V line voltage available
- SelectKelvin Technology: five field-selectable color temperatures (2700K, 3000K, 3500K, 4000K, 5000K)
- High CRI of 92 with R values (R9 50, R13 95) for richer reds and natural skin tones
- Smooth dimming with most forward and reverse phase dimmers*
- California Title 20, Title 24 JA8 compliant
- Provides comfortable, diffused light
- Suitable for use in totally enclosed fixtures and damp locations
- Fixture operating temperature: -4°F to 95°F (-20°C to 35°C)
- Lamp ambient temperature: -4°F to 113°F (-20°C to 45°C)
- Rated Lifetime (L70): 25,000hrs
- 3 year limited warranty**

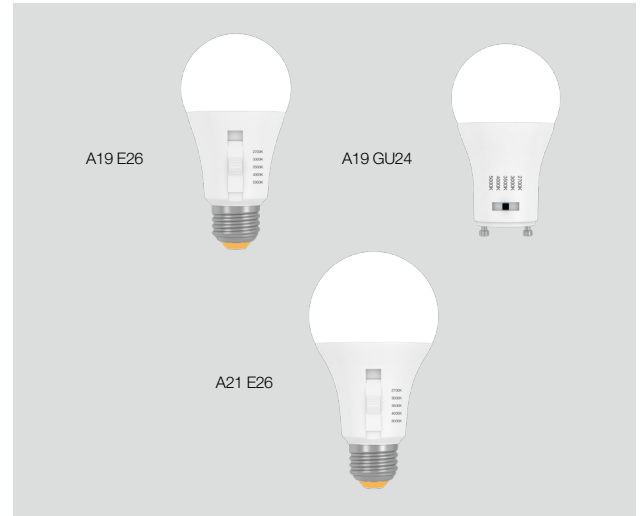

DIGITAL NAVIGATION

Explore the spec sheet through the links below

- [DIMENSION & WEIGHT](#)
- [MINIMUM COMPARTMENT DIMENSIONS](#)
- [LOGISTIC INFORMATION](#)

FOCUS FEATURE



SPECIFICATIONS

Product	Model	Equiv.	Wattage (W)	CCT	Lumens	Efficacy (LPW)	Input Voltage	Beam Angle	CRI	Dim.*	Base	Fixture Rating	Power Factor	JA8	T20	DOE
38344	9A19DIM/9CCTS	60W	9	2700K	800	89	120V	230°	92	Yes	E26	Enclosed	0.9	✓	✓	✓
				3000K												
				3500K												
				4000K												
				5000K												
38345	9A19DIM/9CCTS/GU24	60W	9	2700K	800	89	120V	230°	92	Yes	GU24	Enclosed	0.9	✓	✓	✓
				3000K												
				3500K												
				4000K												
				5000K												
38346	9A19/9CCTS/277V	60W	9	2700K	800	89	120-277V	230°	92	No	E26	Enclosed	0.9@120V 0.7@277V	N.A.	✓	✓
				3000K												
				3500K												
				4000K												
				5000K												
38347	11A19DIM/9CCTS	75W	11	2700K	1,150	104	120V	230°	92	Yes	E26	Enclosed	0.9	✓	✓	✓
				3000K												
				3500K												
				4000K												
				5000K												
38348	12.5A21DIM/9CCTS	100W	12.5	2700K	1,650	132	120V	230°	92	Yes	E26	Enclosed	0.9	✓	✓	✓
				3000K												
				3500K												
				4000K												
				5000K												


FOOTNOTES:
 *This lamp might not be compatible with all dimmers. Please visit www.greencreative.com for compatibility information.
 **Please visit www.greencreative.com for Limited Warranty terms.
 Factory default setting at 2700K CCT.

Note: All rights reserved. All sizes and specifications are subject to change at any time without notice.



CCT SELECT A LAMP

DIMENSION & WEIGHT

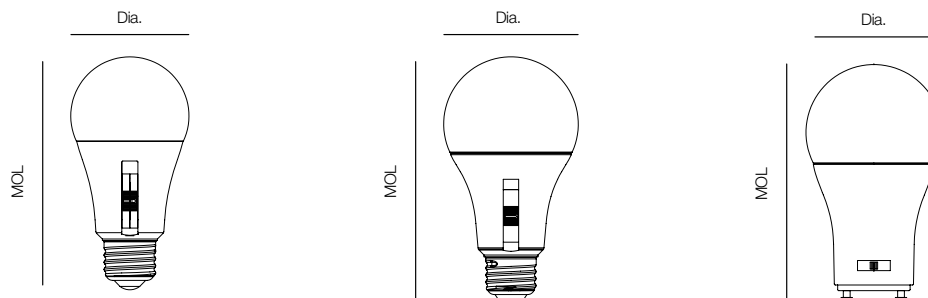

Model	Base	MOL	Dia.	Weight
9A19DIM/9CCTS	E26	4-5/8"	2-3/8"	0.10lb
9A19/9CCTS/277V	E26	4-5/8"	2-3/8"	0.11lb
11A19DIM/9CCTS	E26	4-5/8"	2-3/8"	0.13lb
12.5A21DIM/9CCTS	E26	5-1/16"	2-3/4"	0.15lb
9A19DIM/9CCTS/GU24	GU24	4-3/16"	2-3/8"	0.11lb

MINIMUM COMPARTMENT DIMENSIONS***

Model	Diameter	Height
9A19DIM/9CCTS	6"	8-1/2"
9A19DIM/9CCTS/GU24		
9A19/9CCTS/277V		
11A19DIM/9CCTS		
12.5A21DIM/9CCTS		

FOOTNOTES:

***Installing lamp in a fixture that does not have the minimum compartment dimensions will void the warranty and could cause product failures.

LOGISTIC INFORMATION

Model	Master Carton			Shipping Carton		
	Case Qty	Case Dimensions (LxWxH)	Case Weight	Case Qty	Case Dimensions (LxWxH)	Case Weight
9A19DIM/9CCTS	N.A.	N.A.	N.A.	72pcs	15-1/4" x 15-1/4" x 10-5/16"	10.45lb
9A19DIM/9CCTS/GU24	N.A.	N.A.	N.A.	72pcs	15-1/4" x 15-1/4" x 10-1/16"	9.99lb
9A19/9CCTS/277V	N.A.	N.A.	N.A.	72pcs	15-1/4" x 15-1/4" x 10-5/16"	10.45lb
11A19DIM/9CCTS	N.A.	N.A.	N.A.	72pcs	15-1/4" x 15-1/4" x 10-5/16"	10.45lb
12.5A21DIM/9CCTS	N.A.	N.A.	N.A.	72pcs	17-3/16" x 17-3/16" x 11-1/4"	11.53lb