

Project Name:	Type:
Part Number:	Date:

ADJUSTAPAR LAMPS

FEATURES

- The lamp is equipped with built-in switches that allow users to select from 5 different color temperatures and 2 beam angles, all in one convenient design
- Suitable to replace 75W and 120W halogen lamps
- Innovative optic lens design delivers even light without shadowing
- 5 field selectable color temperatures in 2700K, 3000K, 3500K, 4000K, and 5000K
- 2 field selectable light distributions in narrow flood 25° and flood 40° beam angles
- High CRI 90 for great color accuracy
- California Title 20 regulation compliant
- Available in PAR30, PAR30 short neck, and PAR38 form factors
- PAR30 short neck and PAR38 models are compatible with GREEN CREATIVE SOL Gimbal Track Head
- <https://greencreative.com/product-tag/sol/>
- Smooth dimming with existing dimmers*
- Compact size 1:1 halogen form factor
- Suitable for damp locations and totally enclosed fixtures
- Fixture operating temperature: -4°F to 95°F (-20°C to 35°C)
- Lamp ambient temperature: -4°F to 113°F (-20°C to 45°C)
- Rated Lifetime (L70): 25,000hrs
- 3 year limited warranty**



SCAN ME
or Click Here




Select Kelvin
Select Beam

AdjustaPAR
SERIES

FOCUS FEATURE


2 Selectable Beam Angles

Select Beam

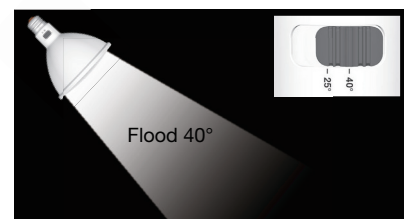

5 Selectable Color Temperatures

Select Kelvin



2700K
SOFT WHITE LIGHT



3000K
WARM WHITE LIGHT



3500K
NEUTRAL WHITE LIGHT



4000K
COOL WHITE LIGHT



5000K
DAY LIGHT

Compatible with SOL Gimbal Track Head



AdjustaPAR
SERIES



The SOL Gimbal track head is designed with E26 medium base and compatible with both H-Type and J-Type adapters for seamlessly integrating with a variety of track rails.

Learn more about SOL Gimbal Track Head

<https://greencreative.com/product-tag/sol/>

Project Name:	Type:
Part Number:	Date:



GREENCREATIVE

ADJUSTAPAR LAMPS


SPECIFICATIONS

Product	Model	Equiv.	Wattage (w)	5 Selectable CCTs	Lumens	Efficacy (LPW)	Input Voltage	2 Selectable Beam Angles	CBCP (cd)	CRI	Dim.*	Power Factor (typ.)	Fixture Rating	T20	DOE
37220	9PAR30DIM/9CCTS/BAS	75W	9	27K / 30K / 35K / 40K / 50K	810	90	120V	25° / 40°	2,510 / 1,315	90	Yes	0.9	Enclosed	✓	✓
37221	9PAR30SNDIM/9CCTS/BAS	75W	9	27K / 30K / 35K / 40K / 50K	810	90	120V	25° / 40°	2,510 / 1,315	90	Yes	0.9	Enclosed	✓	✓
37222	14PAR38DIM/9CCTS/BAS	120W	14	27K / 30K / 35K / 40K / 50K	1,350	96	120V	25° / 40°	4,300 / 2,235	90	Yes	0.9	Enclosed	✓	✓

*This lamp is available for dimming with 120V line voltage only and might not be compatible with all dimmers. Please visit www.greencreative.com for compatibility information.

**Please visit www.greencreative.com for Limited Warranty terms.


DIMENSION & WEIGHT

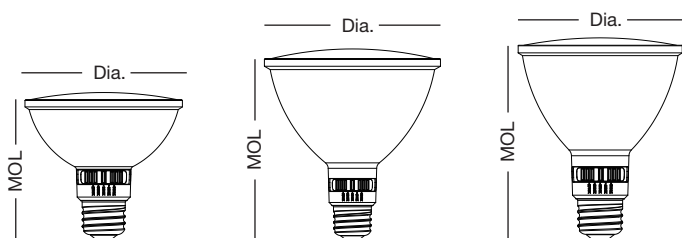


Model	Model	Base	MOL	Dia.	Weight
37220	9PAR30DIM/9CCTS/BAS	E26	4-5/8"	3-3/4"	0.23 lb
37221	9PAR30SNDIM/9CCTS/BAS	E26	3-9/16"	3-3/4"	0.25 lb
37222	14PAR38DIM/9CCTS/BAS	E26	5-3/16"	4-3/4"	0.39 lb

ILLUMINANCE & CANDELA DISTRIBUTION

9PAR30DIM/9CCTS/BAS 25° 2700K

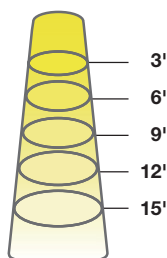


Diameter	Footcandles
1.3	1,753
2.7	406
4.0	185
5.3	105
6.7	66




Degree	Candela
10	1,937
20	648
30	216
40	92
50	49

9PAR30DIM/9CCTS/BAS 40° 2700K

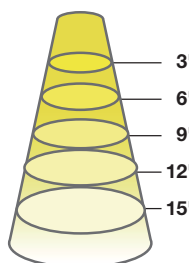

Diameter	Footcandles
2.2	308
4.4	77
6.6	34
8.7	20
10.9	13





Degree	Candela
10	1,248
20	708
30	330
40	179
50	83

Project Name:	Type:
Part Number:	Date:



ADJUSTAPAR LAMPS

ILLUMINANCE & CANDELA DISTRIBUTION



9PAR30SNDIM/9CCTS/BAS 25° 2700K

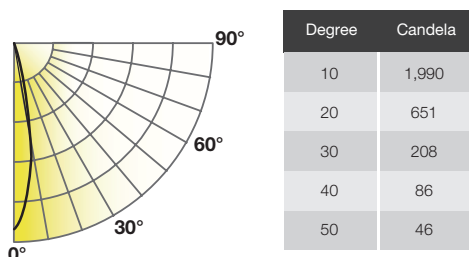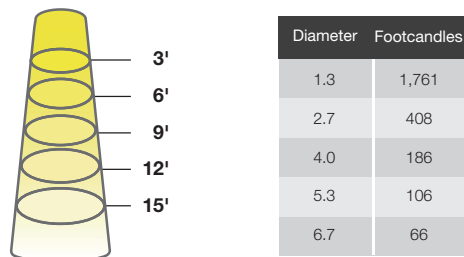



9PAR30SNDIM/9CCTS/BAS 40° 2700K

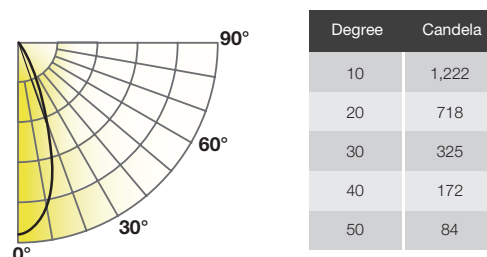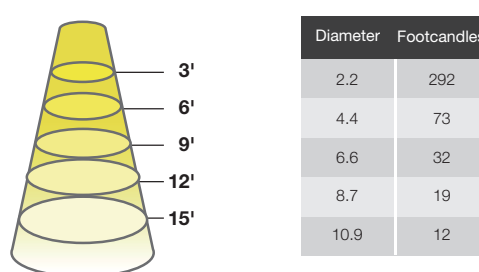

14PAR38DIM/9CCTS/BAS 25° 2700K

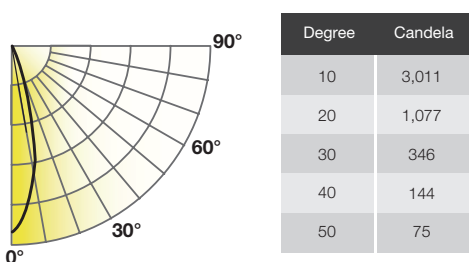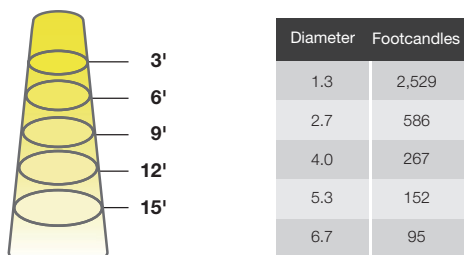

14PAR38DIM/9CCTS/BAS 40° 2700K

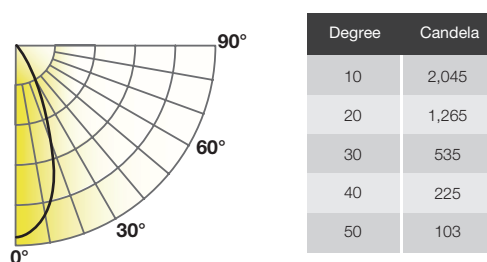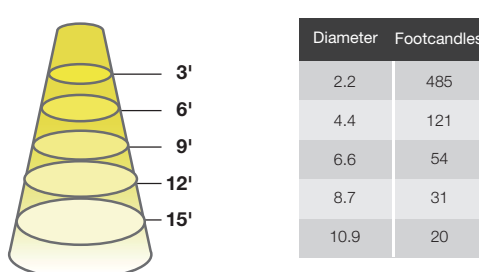

ORDERING INFORMATION

Model	Master Carton			Shipping Carton		
	Case Qty	Case Dimensions (LxWxH)	Case Weight	Case Qty	Case Dimensions (LxWxH)	Case Weight
9PAR30DIM/9CCTS/BAS	6PCS	12-7/16" x 8-1/4" x 5-1/2"	2.34 lb	24PCS	17-5/16" x 13" x 12"	11.6 lb
9PAR30SNDIM/9CCTS/BAS	6PCS	12-7/16" x 8-1/4" x 4-3/8"	2.31 lb	24PCS	17-5/16" x 13" x 9-11/16"	10.32 lb
14PAR38DIM/9CCTS/BAS	6PCS	17-5/16" x 11-5/8" x 6-1/8"	4.63 lb	24PCS	24" x 17-15/16" x 13-3/8"	20.72 lb

Note: All rights reserved. All sizes and specifications are subject to change at any time without notice.