

## FEATURES & SPECIFICATIONS

**INTENDED USE** — Ideal for wet location areas requiring exit signs for AC only or battery back-up power that are subject to saturation with non-mechanically delivered water.

**CONSTRUCTION** — White, compact, contemporary design. Engineering-grade thermoplastic housing is impact-resistant, scratch-resistant and corrosion-proof. Universal directional Chevron inserts are easily removed and reinserted. UL94V-0 flame rating. UV-stable resin resists discoloration from natural and man-made light sources. Rugged, heavy-duty, polycarbonate clear housing lens. Housing also available in black or gray.

**OPTICS** — Low energy consumption - less than 5W. The typical life of the exit LED lamp is 5 years, based on 24/7 operation.

**ELECTRICAL** — Dual voltage input capacity (120/277V).

Battery: (EL Option) – Sealed, maintenance free nickel-cadmium battery delivers 90 minutes rated capacity. Test switch provides manual activation of 30-second diagnostic testing for on-demand visual inspection.

Self-diagnostic testing (SD Option Only) for 30 seconds every 30 days, 30 minutes every 180 days and a 90-minute annual test. Diagnostic evaluation of LED light source, charging and battery condition.

**INSTALLATION** — Universal (top, end or back mount), canopy included. Junction box hole pattern for 4" octagon mounting. Flexible conduit entry.

**LISTINGS** — UL listed. Wet location listed. Standard cold temperature rating -4°F to 122°F (-20°C to 50°C). Meets UL 924, NFPA 101 (current Life Safety Code) and NFPA 70-NEC

**WARRANTY** — 3-year limited warranty. (Battery is prorated.) This is the only warranty provided and no other statements in this specification sheet create any warranty of any kind. All other express and implied warranties are disclaimed. Complete warranty terms located at: [www.acuitybrands.com/support/warranty/terms-and-conditions](http://www.acuitybrands.com/support/warranty/terms-and-conditions)

**Note:** Actual performance may differ as a result of end-user environment and application.

All values are design or typical values, measured under laboratory conditions at 25 °C.

Specifications subject to change without notice.

Catalog Number
Notes
Type

**Wet Location  
Exit Sign**

# DELEON DTL



### ORDERING INFORMATION

Lead times will vary depending on options selected. Consult with your sales representative.

**Example:** DTL W 1 R EL

DLTL	Housing color		Number of faces		Letter color		Operation		Options	
DLTL	W	White	1	Single face	R	Red	(blank)	AC only	(blank)	None
	B	Black	2	Double face	G	Green	EL	Nickel-cadmium battery	TP	Tamperproof screw hardware
	GY	Gray							SD	Self-diagnostics <sup>1</sup>

<b>Accessories:</b> Order as separate catalog number.	
ELA WG1	Wireguard (back mount only)

**Notes**

<sup>1</sup> Only available with EL option.

# DeLeon DTL Wet Location Exit Sign

## SPECIFICATIONS


ELECTRICAL				
Primary circuit				
Type <sup>1</sup>	Typical LED life <sup>2</sup>	AC volts	Input watts	Max. amps
Red LED	>5 years	120	2.7	0.03
		277	2.7	0.02
Green LED	>5 years	120	3.3	0.03
		277	3.4	0.02

BATTERY				
Ni-Cad				
Voltage	Shelf life <sup>3</sup>	Typical life <sup>3</sup>	Maintenance <sup>4</sup>	Optimum temperature <sup>5</sup>
4.8	3 years	6-8 years	none	-4° – 122°F (-20° – 50°C)

### Notes

- 1 LED lamps operate in normal (AC input) and emergency (DC input) modes.
- 2 Based on 24/7 operation. The typical life of the exit LED lamp is 5 years.
- 3 At 77°F (25°C).
- 4 All life safety equipment, including emergency lighting for path of egress, must be maintained, serviced and tested in accordance with all National Fire Protection Association (NFPA) and local codes. Failure to perform the required maintenance, service or testing could jeopardize the safety of occupants and will void all warranties.
- 5 Optimum ambient temperature range where unit will provide capacity for 90 minutes. Higher and lower temperatures affect life and capacity.

## MOUNTING

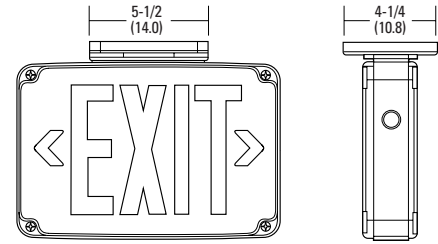

### Specifications

Length: 12-1/2 (31.8)

Depth: 2-1/2 (6.4)

Height: 8-1/8 (20.6)

Weight: 4.1 lbs (1.9 kg)

All dimensions are inches (centimeters) unless otherwise indicated.