



CUSTOMER NAME \_\_\_\_\_

Project Name \_\_\_\_\_

Date \_\_\_\_\_ Type \_\_\_\_\_

Catalog Number \_\_\_\_\_

## EFH1 Series

High Output LED Flood Light  
Mounting & Accessories

### Construction

<b>Housing:</b>	Aluminum die cast enclosure. Integral heat sink for maximum heat transfer
<b>Lens:</b>	Impact resistant tempered glass
<b>Paint:</b>	Corrosion resistant polyester powder paint, minimum 2.0 mil thickness Standard = Black, Dark Bronze, Gray, White (RAL & custom colors available) Optional = Coastal Finish
<b>Weight:</b>	35 lbs (15.9 kgs)

### Optical system

<b>Lumens:</b>	23,400 - 59,000
<b>Distribution:</b>	3x3, 6x5, 6x6, 7x6, 7x7
<b>Efficacy:</b>	121 -164 LPW
<b>CCT:</b>	2700K, 3000K, 4000K, 5000K
<b>CRI:</b>	≥70

### Electrical

<b>Input Voltage:</b>	120-277V, 277-480V
<b>Input Frequency:</b>	50/60 Hz
<b>Power Factor:</b>	≥ 90% at rated watts
<b>Total Harmonic Distortion:</b>	≤ 20% at rated watts

### Surge Protection\*

Typical	Enhanced	Extreme
6kV/3kA*	10kV/5kA*	20kV/10kA*

\*Per ANSI C136.2-2015

### Warranty

5 Year (Standard)

10 Year (Optional)

### Lumen Maintenance

Projected Lxx per IES TM-21-11 at 25°C

Lumen Codes	Distribution	LXX(10K) @ Hours		
		25,000 HR	50,000 HR	60,000 HR
30, 35, 40, 45, 50	77, 76, 67, 66, 65	L97	L94	L93
30, 35, 40, 45, 50	33	L96	L94	L94
55	77, 76, 66, 65	L96	L92	L91
60	77, 76, 66	L96	L92	L90

Note: Projected LXX based on LM80 (> 10,000 hour testing). Accepted Industry tolerances apply to initial luminous flux and lumen maintenance measurements.

### Luminaire Ambient Temperature Factor

Ambient Temp (°C)	Initial Flux Factor	Ambient Temp (°C)	Initial Flux Factor
10	1.02	30	0.99
20	1.01	40	0.98
25	1.00	50	0.97


### Ratings

<b>Operating Temperature:</b>	-40° C to 50° C
<b>Vibration^:</b>	2G - Slipfitter Mounting K1, K2, S1 & S2 3G - Trunnion Mounting T1
<b>LM-79:</b>	Testing in accordance with IESNA Standards

^Per ANSI C136.31-2010

### Controls

<b>Dimming:</b>	Standard - 0-10V Optional - DALI (Option U)
<b>Sensors:</b>	Photo Electric Sensors (PE) available LightGrid and Daintree Compatible



Visit [www.designlights.org/search](http://www.designlights.org/search) to confirm qualifications.

### Ordering Information

**EFH1 02**

**7**

PROD. ID	GEN	VOLTAGE	LUMENS	DISTRIBUTION	CRI	CCT	DIMMING	CONTROLS	MOUNTING	COLOR	OPTIONS
E=Evolve	02	0 = 120-277V <sup>1</sup>	30 = 30,000 lm	33 = NEMA 3x3	7 = 70	27 = 2700K	A = ANSI C136.41 7-Pin Receptacle <sup>4</sup>	A = No Control	K1 = Knuckle slipfitter 1.9 in. - 2.3 in OD Tenon <sup>6</sup>	GRAY = Gray	F = Fusing <sup>1</sup>
FH= Flood High		1 = 120V	35 = 35,000 lm	65 = NEMA 6x5		30 = 3000K	D = No receptacle, with external dimming 18/2 3 ft cable	D = Shorting Cap <sup>5</sup>	K2 = Knuckle slipfitter 1.9 in. - 2.3 in OD Tenon Supplied with 14/3 3ft power cable	BLCK = Black	H2 = Daintree Enabled <sup>7,8</sup> motion Sensor
1= Standard		2 = 208V	40 = 40,000 lm	66 = NEMA 6x6		40 = 4000K	N = No PE Receptacle & Non Dimmable	E = ANSI C136.41 7-pin with non-Dimming PE Control <sup>5</sup>	S1 = Knuckle slipfitter 2.3-3.0 in. OD Tenon <sup>8</sup>	DKBZ = Dark Bronze	H4 = Motion Sensor (FSP221) <sup>8</sup>
		3 = 240V	45 = 45,000 lm	76 = NEMA 7x6		50 = 5000K	P = ANSI C136.41 7-Pin Receptacle with external dimming 18/2 3 ft cable <sup>4</sup>		S2 = Knuckle slipfitter 2.3-3.0 in. OD Tenon, Supplied with 14/3 3ft power cable	WHITE = White	L = Tool-Less Entry
		4 = 277V	50 = 50,000 lm	77 = NEMA 7x7					T1 = Trunnion with external 3ft #14/3 power cable		NOM = NOM3 <sup>11</sup>
		5 = 480V	55 = 55,000 lm <sup>2,3</sup>						V1 = Knuckle Wall Mount <sup>6</sup>		P06 = Prewired with 6ft #14/3 cable
		D = 347V	60 = 60,000 lm <sup>2,3</sup>								R = 10kV/5kA Enhanced Surge Protection Device (SPD)
		E = 277-480V <sup>1</sup>									T = 20kV/10kA Enhanced Surge Protection Device (SPD)
											U = DALI Dimming <sup>9</sup>
											V0 = 3-Position Terminal Block
											V1 = FAM module
											Y = Coastal Finish <sup>10</sup>

**NOTES**

- <sup>1</sup> Fusing requires discrete voltage
- <sup>2</sup> Not Available in 3x3 distribution
- <sup>3</sup> Not Available in 6x5 distribution
- <sup>4</sup> Restricted aiming angle of 0-45°
- <sup>5</sup> Can only be ordered with "A" or "P" Dimming Options
- <sup>6</sup> Supplied with leads
- <sup>7</sup> Not available in 347V, 480V OR 277-480V
- <sup>8</sup> Only available in K1 or S1 mount
- <sup>9</sup> Compatible with LightGrid System
- <sup>10</sup> Recommended for installations within 750 feet from coast. Lead time varies, check with factory
- <sup>11</sup> Contact Manufacturer

## EFH Series

High Output LED Flood Light  
Mounting & Accessories

### CUSTOMER NAME

Project Name \_\_\_\_\_

Date \_\_\_\_\_ Type \_\_\_\_\_

Catalog Number \_\_\_\_\_

LUMEN OUTPUT	DIST CODE	CLASSIFICATION [HXV]	TYPICAL INITIAL LUMENS				SYSTEM WATTAGE
			2700K	3000K	4000K	5000K	
30	77	7x7	27000	29100	30000	30000	183
35			31500	33900	35000	35000	213
40			36000	38800	40000	40000	248
45			40500	43600	45000	45000	285
50			45000	48500	50000	50000	323
55			49500	53300	53500	53500	356
60			53100	57200	59000	59000	366
30	76	7x6	27000	29100	30000	30000	183
35			31500	33900	35000	35000	213
40			36000	38800	40000	40000	248
45			40500	43600	45000	45000	285
50			45000	48500	50000	50000	323
55			49500	53300	55000	55000	356
60			53100	57200	59000	59000	366
30	66	6x6	27000	29100	30000	30000	183
35			31500	33900	35000	35000	213
40			36000	38800	40000	40000	248
45			40500	43600	45000	45000	285
50			45000	48500	50000	50000	323
55			49500	53300	55000	55000	356
60			53100	57200	59000	59000	366
30	65	6x5	23400	25300	26100	26100	183
35			27300	29400	30400	30400	213
40			31300	33700	34800	34800	248
45			35100	37900	39100	39100	285
50			39100	42100	43500	43500	323
60			53100	57200	59000	59000	366
30	33	3x3	26500	27300	28500	28500	193
35			32500	33600	35000	35000	246
40			37200	38400	40000	40000	285
45			41800	43200	45000	45000	325
50			46500	48000	50000	50000	365

For additional information on Shielded and Non-Shielded EFH IES files, please refer to LED.com

## EFH1 Series

High Output LED Flood Light  
Mounting & Accessories

CUSTOMER NAME \_\_\_\_\_


Project Name \_\_\_\_\_

Date \_\_\_\_\_ Type \_\_\_\_\_


Catalog Number \_\_\_\_\_

**EFH1**  
**NEMA 7x7**


59,000 Lumens  
4000K  
EFH102\_6077740\_.....IES



• Mounting Height at 35°  
• 45° Tilt Initial Footcandle at Grade




— Vertical Axial Candela Distribution  
— Horizontal Axial Candela Distribution




**EFH1**  
**NEMA 7x6**


59,000 Lumens  
4000K  
EFH102\_6076740\_.....IES



• Mounting Height at 35°  
• 45° Tilt Initial Footcandle at Grade




— Vertical Axial Candela Distribution  
— Horizontal Axial Candela Distribution




**EFH1**  
**NEMA 6x6**


59,000 Lumens  
4000K  
EFH102\_6066740\_.....IES



• Mounting Height at 35°  
• 45° Tilt Initial Footcandle at Grade




— Vertical Axial Candela Distribution  
— Horizontal Axial Candela Distribution




**EFH1**  
**NEMA 6x5**


43,500 Lumens  
4000K  
EFH102\_5065740\_.....IES



• Mounting Height at 35°  
• 45° Tilt Initial Footcandle at Grade




— Vertical Axial Candela Distribution  
— Horizontal Axial Candela Distribution




**EFH1**  
**NEMA 3x3**


50,000 Lumens  
4000K  
EFH102\_5033740\_.....IES



• Mounting Height at 35°  
• 45° Tilt Initial Footcandle at Grade



— Vertical Axial Candela Distribution  
— Horizontal Axial Candela Distribution



## EFH1 Series

High Output LED Flood Light  
Mounting & Accessories

### CUSTOMER NAME



Project Name \_\_\_\_\_

Date \_\_\_\_\_ Type \_\_\_\_\_

Catalog Number \_\_\_\_\_



### H4 Motion Sensing Option

<b>Recommended Mounting Height:</b>	15-30' (4.6-9.1m)
<b>Coverage Radius:</b>	15-30' (4.6-6.1 m)
<b>Lateral Coverage:</b>	300 °
<b>Power:</b>	Adds < 1W to fixture power rating
<b>Default Settings:</b>	
<b>Output:</b>	Occupied - 100% Unoccupied - 10%
<b>PE Sensor:</b>	None
<b>Ramp/Fade:</b>	Disabled
<b>Time (Off) Delay:</b>	5 min.
<b>Field:</b>	Programmable using FSIR-100 hand held programmer (197634)

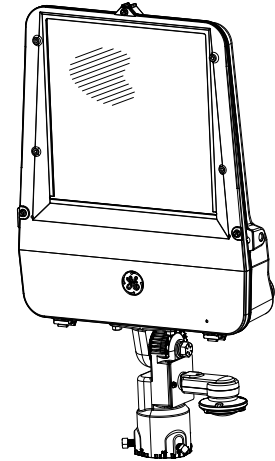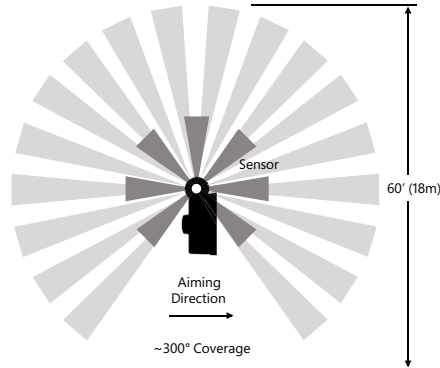

### H2 - Daintree Enabled Motion Sensing Option

<b>Recommended Mounting Height:</b>	15-30' (4.6-9.1m)
<b>Coverage Radius:</b>	15-30' (4.6-6.1 m)
<b>Lateral Coverage:</b>	300 °
<b>Power:</b>	Adds < 1W to fixture power rating
<b>Default Settings:</b>	
<b>Output:</b>	Occupied - 100% Unoccupied - 10%
<b>PE Sensor:</b>	None
<b>Ramp/Fade:</b>	Disabled
<b>Time (Off) Delay:</b>	10 min.
Requires Wireless Area Controller (WAC)	

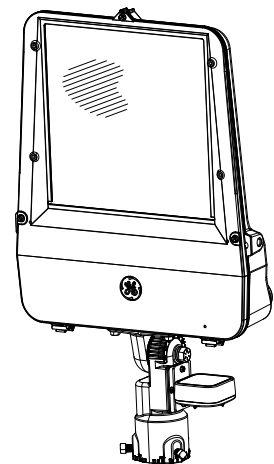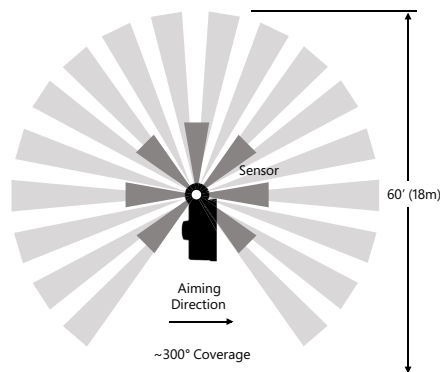

## EFH1 Series


High Output LED Flood Light  
Mounting & Accessories

CUSTOMER NAME \_\_\_\_\_

Project Name \_\_\_\_\_

Date \_\_\_\_\_ Type \_\_\_\_\_

Catalog Number \_\_\_\_\_

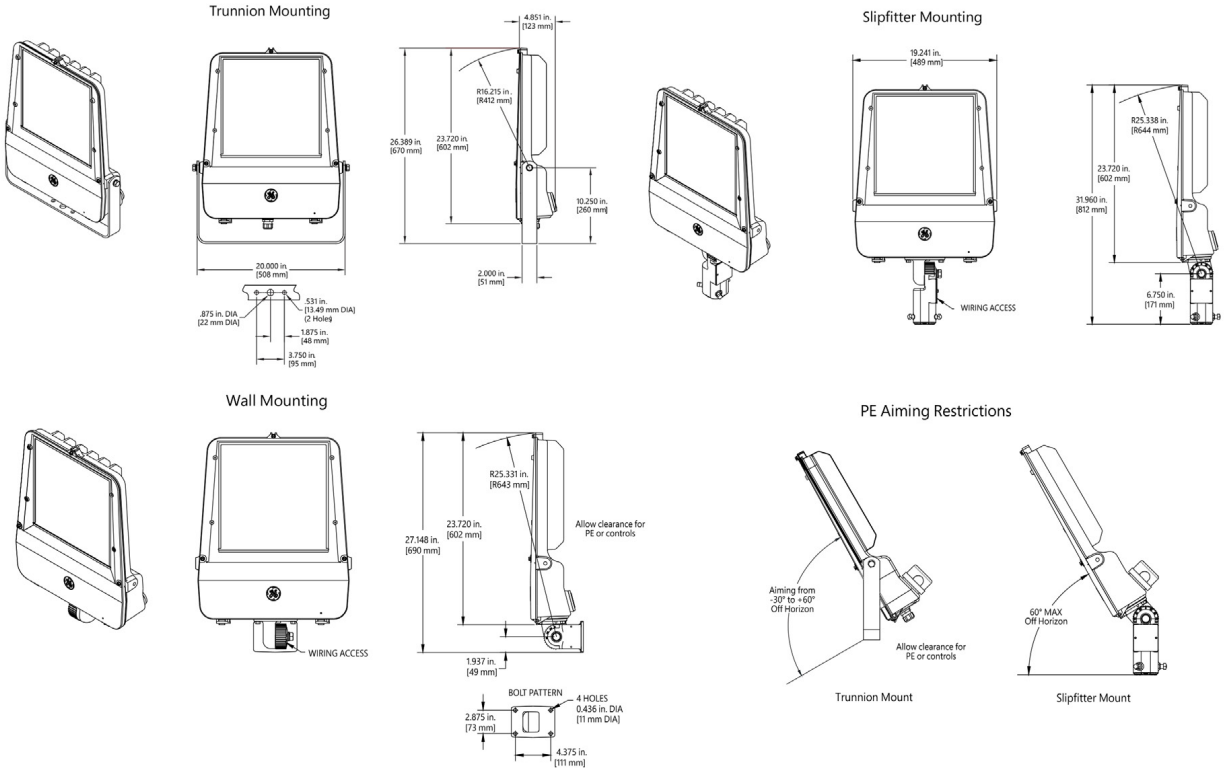

### Mounting

### Effective Projected Area

#### Option K

- K1=Knuckle Slipfitter for 2.3 in. OD Tenon. Lead wires exiting tenon.
- K2=Knuckle Slipfitter for 2.3 in. OD Tenon, ext. 3ft #14/3 cord.

#### Option S

- S1=Knuckle Slipfitter for 2.3 in.-3.0 in. OD Tenon. Lead wires exiting tenon.
- S2=Knuckle Slipfitter for 2.3 in.-3.0 in. OD Tenon, ext. 3ft #14/3 cord.


**Option V** – V1=Knuckle Wall Mount. Lead wires exiting tenon.

**Option T** – T1=Trunnion, with external 3ft #14/3 cord.

- Vertical 3.51 sq ft (0.33 sq M) (aimed at horizon)
- Tilted 1.79 sq ft (0.17 sq M) (aimed down 45 degrees)

### Shields


SAP Number	Part Number	Description	Color
93033494	TSVBLCK-EFH	Top and Side Visor	Black
93033655	TSVDKBZ-EFH	Top and Side Visor	Dark Bronze
93033493	TSVGRAY-EFH	Top and Side Visor	Gray
93033656	TSVWHITE-EFH	Top and Side Visor	White
93034260	VAN-EFH	Vandal Shield	
93034259	WG-EFH	Wire Guard	
93034837	BDABLCK-EFH	Barn Doors	Black
93034838	BDADKBZ-EFH	Barn Doors	Dark Bronze
93034836	BDAGRAY-EFH	Barn Doors	Gray
93034839	BDAWHITE-EFH	Barn Doors	White




**TSV**  
Top & Side Visor



**VAN**  
Vandal Shield



**WG**  
Wire Guard



**BDA**  
Barn Doors

### Accessories

SAP Number	Part Number	Description
93123552	WANSI - 277	ANSI C136.41 Dimming PE Daintree Enable, 105-305V
93123553	WANSI - 480	ANSI C136.41 Dimming PE Daintree Enable, 312-530V
93029237	PED-MV-LED-7	ANSI C136.41 Dimming PE, 120-277V
93029238	PED-347-LED-7	ANSI C136.41 Dimming PE, 347V
93029239	PED-480-LED-7	ANSI C136.41 Dimming PE, 480V
28299	PEC0TL	Standard 120-277V
28294	PEC5TL	Standard 480V
80436	PECCTL	Standard 347V
93147530	PECHTL	Long Life Standard PE, 347-480V
73251	SCCL-PECTL	Shorting Cap