Project:

Catalog #:

Fixture Type:

Notes:

Emergency Lighting Series

Wet Location Emergency Light – High Lumen, Internal LED lamp heads

Features:

- 2 high intensity lamp heads
- 24 hour recharge, 90 min discharge
- Easy installation
- Test switch and battery charging indicator
- Maintenance free $LiFePO_4$ battery
- 3 Year Warranty

ELTPW G1 HI W

Wet Location Emergency Light - High Lumen Internal

CATALOG

Product Number	Description
ELTPW G1 HI W	Wet Location Emergency Light - High Lumen Internal

Specifications

Voltage
120/277V AC

Housing
Polycarbonate material and waterproof designed plastic enclosure with 5VA flame retardant and UV resistance.

Mounting
Suitable for wall and ceiling mount.

Operating Temperature
5°C to 50°C (41°F to 122°F)

Emergency Light Output
LED internal lamp heads, 1450 Lumen output,

Certifications
UL listed for wet locations, NFPA 70, NFPA 101 life safety code. Complies with CEC title 20 efficiency regulations. NEMA 4X rated.

Finish
White

Warranty
3 Year warranty

ORDERING GUIDE

Example: **ELTPW G1 HI W**

Fixture Type	Application	Generation	Voltage	Lumen Output	Lights Placement	Finish
• **ELTP** Emergency Light	• **W** Wet Location	• **G1** First Generation	• **BLANK** 120-277 V	• **H** High Lumen Output	• **I** Internal	• **W** White

Due to continuous product improvements, specification and/or equipment updates may change without notice.

©2024 Spring Lighting Group. All Rights Reserved.

11325 Cash Road, Suite #100, Houston, Texas 77477

713-389-5680 | sales@slgus.com | www.slgus.com

Parameters

Model	ELTPW G1 MI
Battery	Ni-Cad 3.6V4000mAh
Recharge Time	24 Hours
Emergency Duration	90 Minutes
Input Voltage/Freq.	120/277V 60Hz
Input Current	70mA
Power Consumption	5W
Lamp Heads	x2 5.4W
Lumen Output	1450 Lm

Dimensions:

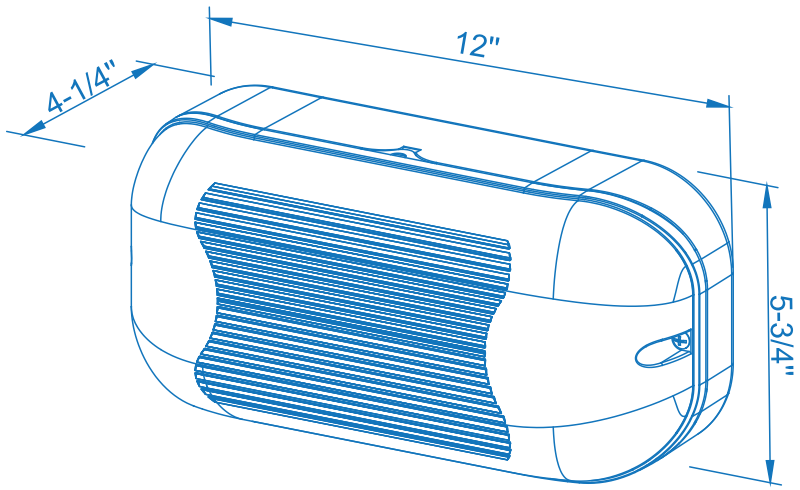

Photometrics

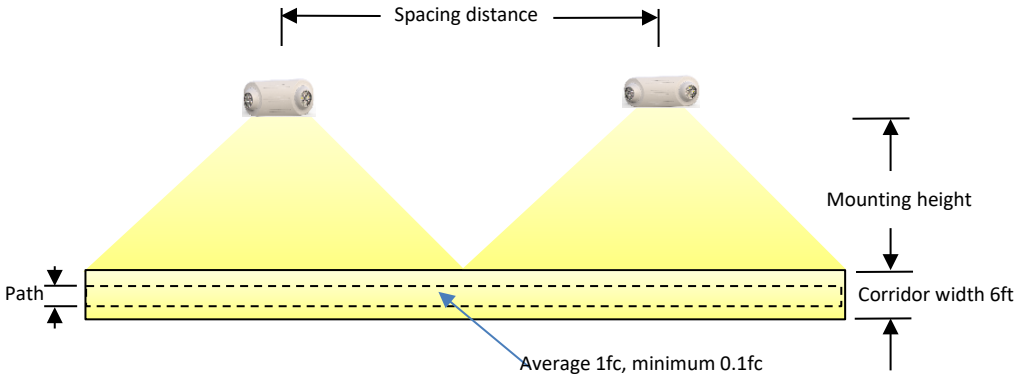



ELTPW HI, 12.8° beam angle

Model	7.5ft Mount Height 6ft Wide corridor 3ft Wide path	7.5ft Mount Height 6ft Wide corridor 6ft Wide path	10ft Mount Height 6ft Wide corridor 3ft Wide path	10ft Mount Height 6ft Wide corridor 6ft Wide path
ELTPW HI (1450 Lm)	118ft spacing	109ft spacing	109ft spacing	95ft spacing

ELTPWHIG1.V24.02
Last Updated: May 6, 2024 5:19 PM
©2024 Spring Lighting Group. All Rights Reserved.
11325 Cash Road, Suite #100, Houston, Texas 77477
713-389-5680 | sales@slgus.com | www.slgus.com