

Presented By: Candela Corporation
Contact Phone: (800) 922-9226
Contact E-mail: sales@candelacorp.com

Customer Name:
Project Name:
Fixture Type:




GE
Lighting

15491 - F25T8XL/SPX41ECO

GE Ecolux® Starcoat® T8

- Passes TCLP, which can lower disposal costs.
- Provides significantly longer life than standard lamp helping to reduce maintenance costs

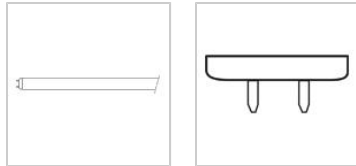


CAUTIONS & WARNINGS

- Caution**
- Lamp may shatter and cause injury if broken
 - Wear safety glasses and gloves when handling lamp.
 - Do not use excessive force when installing lamp.

- Warning**
- Risk of Electric Shock
 - Turn power off before inspection, installation or removal.

GRAPHS & CHARTS

Spectral Power Distribution

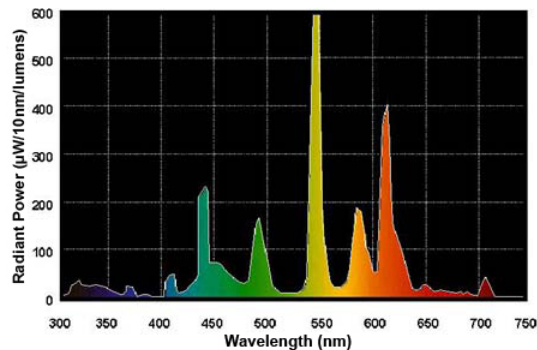

Lumen Maintenance

GENERAL CHARACTERISTICS

Lamp Type	Linear Fluorescent - Straight
	Linear
Bulb	T8
Base	Medium Bi-Pin (G13)
Wattage	25
Voltage	100
Rated Life	24000 hrs
Rated Life (instant start) @ Time	20000 h @ 3 h 24000 h @ 12 h
Rated Life (rapid start) @ Time	29000.0 @ 12.0 h
Bulb Material	Soda lime
Starting Temperature	10 K (50 °F)
LEED-EB MR Credit	81 picograms Hg per mean lumen hour
Additional Info	TCLP compliant

PHOTOMETRIC CHARACTERISTICS

Initial Lumens	2150
Mean Lumens	2040
Nominal Initial Lumens per Watt	86
Color Temperature	4100 K
Color Rendering Index (CRI)	86
S/P Ratio (Scotopic/Photopic Ratio)	1.8

ELECTRICAL CHARACTERISTICS


Open Circuit Voltage (rapid start)	355 V
Open Circuit Voltage (rapid start) Min @ Temperature	260 V @ 10 °C
Cathode Resistance Ratio - Rh/Rc (MIN)	4.25
Cathode Resistance Ratio - Rh/Rc (MAX)	6.5
Current Crest Factor	1.7

DIMENSIONS

Maximum Overall Length (MOL)	35.78 cm
Minimum Overall Length	35.67 cm
Nominal Length	36 cm
Bulb Diameter (DIA)	1 cm
Bulb Diameter (DIA) (MIN)	0.94 cm
Bulb Diameter (DIA) (MAX)	1 cm
Outside Bulb Diameter	
Max Base Face to Base Face (A)	35.22 cm
Face to End of Opposing Pin (B) (MIN)	35.4 cm
Face to End of Opposing Pin (B) (MAX)	35.5 cm
End of Base Pin to End of Opposite Pin End (C)	35.67 cm

PRODUCT INFORMATION

Product Code	15491
Description	F25T8XL/SPX41ECO
ANSI Code	1002-1
Standard Package	Case
Standard Package GTIN	10043168154915
Standard Package Quantity	24
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	24
UPC	043168154918

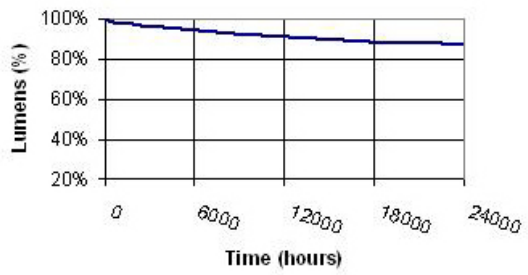

Lamp Mortality

