



# T5 Standard

F35T5/841

Philips T5 Fluorescent Lamps featuring ALTO® Lamp Technology offer increased energy savings and low toxicity in a slim profile.

## Product data

### • General Characteristics

System Description	High Efficiency
Base	Miniature Bipin
Base Information	Green Plate
Bulb	T5 [16 mm]
Life to 10% fail	19000 hr
Preheat EL,3h	
Rated Avg. Life	24000 hr
LSF HF Preheat	99 %
2000h Rated,3h	
LSF HF Preheat	99 %
4000h Rated,3h	
LSF HF Preheat	99 %
6000h Rated,3h	
LSF HF Preheat	99 %
8000h Rated,3h	
LSF HF Preheat	99 %
12000h Rated,3h	
LSF HF Preheat	97 %
16000h Rated,3h	
LSF HF Preheat	84 %
20000h Rated,3h	

### • Light Technical Characteristics

Color Code	841 [CCT of 4100K]
Color Rendering Index	80 (min), 82 (nom), 85 (max) Ra8
Color Designation	Cool White
Color Temperature	4100 K
Luminous Flux EL	3325 Lm
25°C, Rated	
Luminous Flux EL	3325 Lm
25°C, Nominal	
Initial Lumens	3650 Lm
Lum Efficacy Rated	94 Lm/W
HF 25°C	

Lum Efficacy Rated	105 Lm/W
HF 35°C	
LLMF HF 2000h	96 %
Rated	
LLMF HF 4000h	95 %
Rated	
LLMF HF 6000h	94 %
Rated	
LLMF HF 8000h	93 %
Rated	
LLMF HF 12000h	92 %
Rated	
LLMF HF 16000h	91 %
Rated	
LLMF HF 20000h	90 %
Rated	
Design Temperature	35 C
Chromaticity Coordinate X	380 -
Chromaticity Coordinate Y	380 -

### • Electrical Characteristics

Watts	35 W
Lamp Wattage EL	35.5 W
25°C, Rated	
Lamp Wattage EL	35.0 W
25°C, Nominal	
Lamp Wattage EL	34.7 W
35°C	
Lamp Voltage EL	205 V
25°C	
Lamp Voltage EL	209 V
35°C	
Lamp Current EL	0.175 A
25°C	

# T5 Standard

Lamp Current EL 0.170 A  
 35°C  
 Dimmable Yes

### • Environmental Characteristics

Energy Efficiency Label (EEL) A+  
 Mercury (Hg) Content 1.4 mg  
 Energy consumption kWh/1000h 38 kWh

### • Measuring Conditions

Calibration Current 0.170 A  
 HF Generator Rated Voltage 413 V  
 Resistor 1200 ohm


### • Product Dimensions

Base Face to Base Face A 1449.0 (max) mm  
 Insertion Length B 1453.7 (min), 1456.1 (max) mm  
 Overall Length C 1463.2 (max) mm  
 Diameter D 17 (max) mm

### • Product Data


Product number 230953  
 Full product name MASTER TL5 HE 35W/840 UNP  
 Short product name MASTER TL5 HE 35W/840 UNP  
 Pieces per Sku 1  
 eop\_pck\_cfg 40  
 Skus/Case 40  
 Bar code on pack 8711500611055  
 Bar code on case 8711500634689  
 Logistics code(s) 927927084018  
 tpd\_ilcos\_cd FDH-35/40/1B-L/P-G5-16/1450  
 eop\_net\_weight\_pp 128.700 gr

## Dimensional drawing

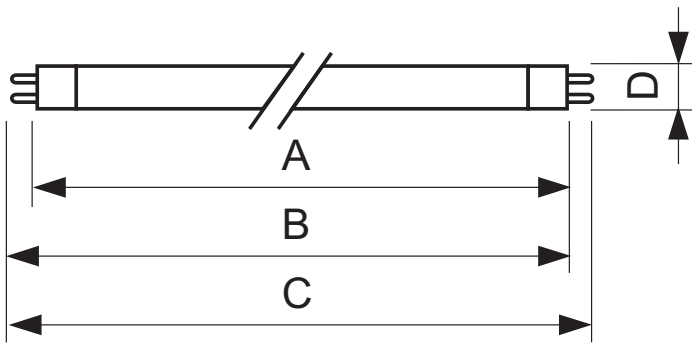



### F35T5/841

Product	A (Max)	B (Min)	B (Max)	C (Max)	D (Max)
TL5 HE F35T5/841 HE Alto	1449.0	1453.7	1456.1	1463.2	17



G5

## Photometric data

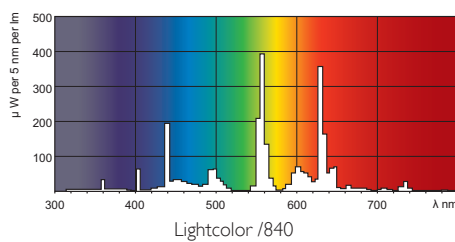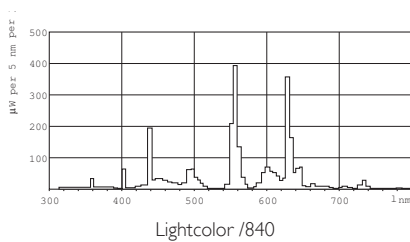



© 2014 Koninklijke Philips N.V. (Royal Philips)  
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

[www.philips.com/lighting](http://www.philips.com/lighting)

2014, November 30  
data subject to change