



T5 High Output

39W/830 Min Bipin T5 HO ALTO UNP

Philips T5 HO lamps are environmentally-responsible, ultra-slim and have extraordinary light output and longer life.

Product data

• General Characteristics

System Description	High Output
Base	Miniature Bipin
Base Information	Green [Green Base]
Bulb	T5 [16 mm]
Life to 10% fail	21000 hr
Preheat EL,3h	
Rated Avg. Life	30000 hr
LSF HF Preheat	99 %
2000h Rated,3h	
LSF HF Preheat	99 %
4000h Rated,3h	
LSF HF Preheat	99 %
6000h Rated,3h	
LSF HF Preheat	99 %
8000h Rated,3h	
LSF HF Preheat	99 %
12000h Rated,3h	
LSF HF Preheat	97 %
16000h Rated,3h	
LSF HF Preheat	84 %
20000h Rated,3h	

• Light Technical Characteristics

Color Code	830 [CCT of 3000K]
Color Rendering Index	80 (min), 82 (nom), 85 (max) Ra8
Color Designation	Warm White
Color Temperature	3000 K
Luminous Flux EL	3100 Lm
25°C, Rated	
Luminous Flux EL	3100 Lm
25°C, Nominal	
Initial Lumens	3500 Lm
Lum Efficacy Rated	82 Lm/W
HF 25°C	

Lum Efficacy Rated	92 Lm/W
HF 35°C	
LLMF HF 2000h	96 %
Rated	
LLMF HF 4000h	95 %
Rated	
LLMF HF 6000h	94 %
Rated	
LLMF HF 8000h	93 %
Rated	
LLMF HF 12000h	92 %
Rated	
LLMF HF 16000h	91 %
Rated	
LLMF HF 20000h	90 %
Rated	
Design Temperature	35 C
Chromaticity Coordinate X	440 -
Chromaticity Coordinate Y	403 -

• Electrical Characteristics

Watts	39 W
Lamp Wattage EL	38.0 W
25°C, Rated	
Lamp Wattage EL	38.0 W
25°C, Nominal	
Lamp Wattage EL	38.0 W
35°C	
Lamp Voltage EL	118 V
25°C	
Lamp Voltage EL	112 V
35°C	
Lamp Current EL	0.325 A
25°C	

PHILIPS

T5 High Output

Lamp Current EL 0.340 A
 35°C
 Dimmable Yes

Insertion Length B 853.7 (min), 856.1 (max) mm
 Overall Length C 863.2 (max) mm
 Diameter D 17 (max) mm

• Environmental Characteristics

Energy Efficiency Label (EEL) A
 Mercury (Hg) Content 1.4 mg

• Measuring Conditions

Calibration Current 0.340 A
 HF Generator Rated Voltage 224 V
 Resistor 330 ohm



• Product Dimensions

Base Face to Base Face A 849.0 (max) mm

• Product Data

Product number 290221
 Full product name 39W/830 Min Bipin T5 HO ALTO UNP
 Short product name 39W/830 Min Bipin T5 HO ALTO UNP
 Pieces per Sku 1
 eop_pck_cfg 40
 Skus/Case 40
 Bar code on pack 46677290221
 Bar code on case 50046677290226
 Logistics code(s) 927992683022
 tpd_ilcos_cd FDH-39/30/1B-L/P-G5-16/1150
 eop_net_weight_pp 78.000 gr

Dimensional drawing


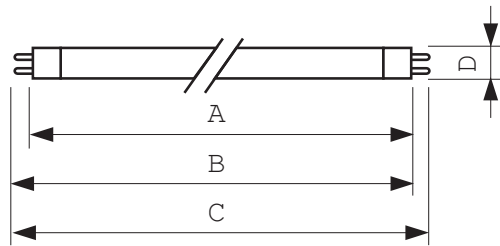


G5

39W/830 Min Bipin T5 HO ALTO UNP

Product	A (Max)	B (Min)	B (Max)	C (Max)	D (Max)
TL5 HO F39T5/830 HO Alto	849.0	853.7	856.1	863.2	17

Photometric data

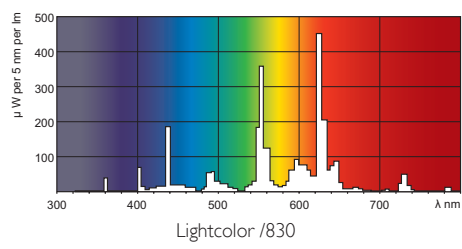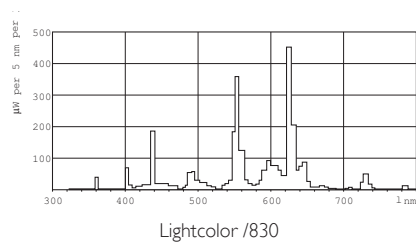

© 2014 Koninklijke Philips N.V. (Royal Philips)
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2014, October 31
data subject to change