



T5 High Output

54W/840 Min Bipin T5 HO ALTO UNP

Philips T5 HO lamps are environmentally-responsible, ultra-slim and have extraordinary light output and longer life.

Product data

• General Characteristics

System Description	High Output
Base	Miniature Bipin
Base Information	Green [Green Base]
Bulb	T5 [16 mm]
Life to 10% fail	21000 hr
Preheat EL,3h	
Rated Avg. Life	30000 hr
LSF HF Preheat	99 %
2000h Rated,3h	
LSF HF Preheat	99 %
4000h Rated,3h	
LSF HF Preheat	99 %
6000h Rated,3h	
LSF HF Preheat	99 %
8000h Rated,3h	
LSF HF Preheat	99 %
12000h Rated,3h	
LSF HF Preheat	97 %
16000h Rated,3h	
LSF HF Preheat	84 %
20000h Rated,3h	

• Light Technical Characteristics

Color Code	841 [CCT of 4100K]
Color Rendering Index	80 (min), 82 (nom), 85 (max) Ra8
Color Designation	Cool White
Color Temperature	4100 K
Luminous Flux EL	4450 Lm
25°C, Rated	
Luminous Flux EL	4450 Lm
25°C, Nominal	
Initial Lumens	5000 Lm
Lum Efficacy Rated	82 Lm/W
HF 25°C	

Lum Efficacy Rated	93 Lm/W
HF 35°C	
LLMF HF 2000h	96 %
Rated	
LLMF HF 4000h	95 %
Rated	
LLMF HF 6000h	94 %
Rated	
LLMF HF 8000h	93 %
Rated	
LLMF HF 12000h	92 %
Rated	
LLMF HF 16000h	91 %
Rated	
LLMF HF 20000h	90 %
Rated	
Design Temperature	35 C
Chromaticity Coordinate X	380 -
Chromaticity Coordinate Y	380 -

• Electrical Characteristics

Watts	54 W
Lamp Wattage EL	54.1 W
25°C, Rated	
Lamp Wattage EL	54.1 W
25°C, Nominal	
Lamp Wattage EL	53.8 W
35°C	
Lamp Voltage EL	120 V
25°C	
Lamp Voltage EL	118 V
35°C	
Lamp Current EL	0.455 A
25°C	

PHILIPS

T5 High Output

Lamp Current EL 0.460 A
 35°C
 Dimmable Yes

Insertion Length B 1153.7 (min), 1156.1 (max) mm
 Overall Length C 1163.2 (max) mm
 Diameter D 17 (max) mm

• Environmental Characteristics

Energy Efficiency Label (EEL) A
 Mercury (Hg) Content 1.4 mg

• Measuring Conditions

Calibration Current 0.460 A
 HF Generator Rated Voltage 235 V
 Resistor 255 ohm


• Product Dimensions

Base Face to Base Face A 1149.0 (max) mm

• Product Data


Product number 290833
 Full product name 54W/840 Min Bipin T5 HO ALTO UNP
 Short product name 54W/840 Min Bipin T5 HO ALTO UNP
 Pieces per Sku 1
 eop_pck_cfg 40
 Skus/Case 40
 Bar code on pack 46677290832
 Bar code on case 50046677290837
 Logistics code(s) 927993184022
 tpd_ilcos_cd FDH-54/40/1B-L/P-G5-16/1150
 eop_net_weight_pp 104.500 gr

Dimensional drawing

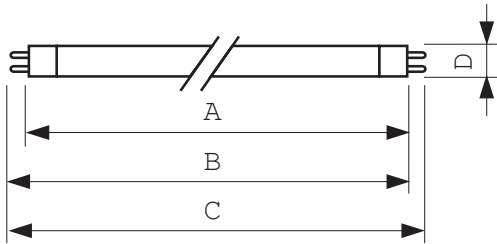



54W/840 Min Bipin T5 HO ALTO UNP

Product	A (Max)	B (Min)	B (Max)	C (Max)	D (Max)
TLS HO F54T5/841 HO Alto	1149.0	1153.7	1156.1	1163.2	17



G5

Photometric data

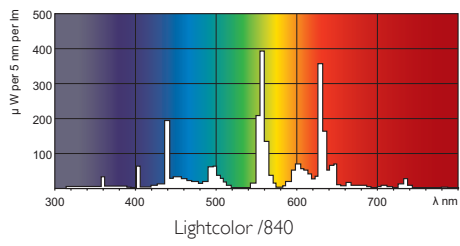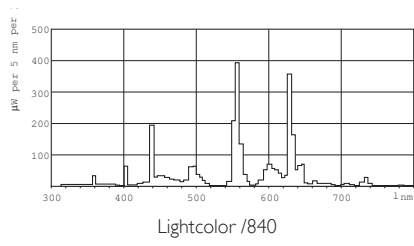

© 2014 Koninklijke Philips N.V. (Royal Philips)
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2014, October 31
data subject to change