

LED Driver Type	Constant Current (Class2)
Maximum Wattage	60 Watts
Input Voltage	108-305VAC Universal
Input Frequency	50/60Hz

APPROVALS:

- UL 8750 recognized component



L SERIES

LED DRIVERS


ELECTRICAL SPECIFICATIONS

Watts	Hatch Part Number	Dimming Type	Input Voltage	Input Power	Power Factor	Input Current 120-277V	Output Voltage	Rated Current (mA)	Output Power	Configuration
Dimming Models										
60	LC60-1600Z-UNV-F	0-10 Volt Dimming	Universal 108 - 305VAC	70W	>0.90	0.61A / 0.27A	18-36V	1660mA	30 - 60W	F


PRODUCT FEATURES :

- Short circuit and open circuit protection
- Meets FCC47 CFR Part 15 (Class B) Consumer Limits
- Type 1 Outdoor, suitable for dry and damp locations
- Case material: Metal

DIMMING WIRING DIAGRAM:

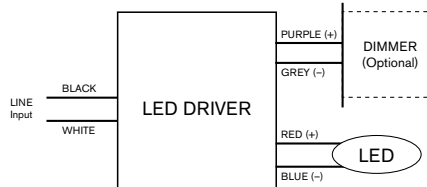

CASE DIMENSIONS & MECHANICAL SPECIFICATIONS:

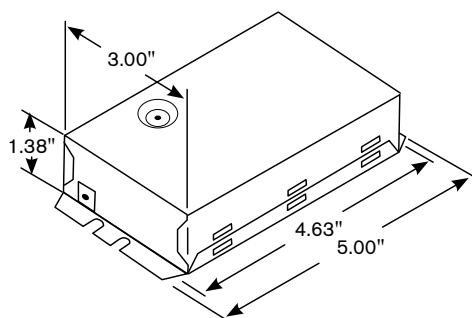

CONFIGURATION

F - Compact style metal case with mounting feet

Wiring Information

Lead Length : Input: 12", Output: 12"
Wire Type : Input: 18AWG, 90°C, 1000V

Tc Point Location Max. T c Point Temp.: 90°C

