



T-3/4 MINIATURE BAYONET & SCREW BASE 6 & 7 CLUSTER LEDs

ORDERING INFORMATION: MB119 6 WC 2 - 24V/25 - DP
(A) (B) (C) (D) (E) (F)

(A) MODEL

MB119, MS119
MBF119, MSF119 (FLAT-TOP)

(B) NUMBER OF LEDS



6= 6, T-1 3mm CLUSTER LED
7= 7, T-1 3mm CLUSTER LED

(C) LED LENS COLOR

WC= WATER CLEAR

(D) LED EMMITING COLOR & WAVELENGTH

- 1= ULTRA RED (660nm) **OBSELETE**
- 2= STD. RED (630-635nm)
- U2= ULTRA EFF. RED. (623-630nm)
- 3= STD. ORANGE (605-610nm)
- U3= ULTRA ORANGE (612-620nm)
- 4= STD. YELLOW (585nm)
- *S4= ULTRA YELLOW (590-595nm)
- 5= STD. GREEN (565-570nm)
- *6NW= ULTRA PURE GREEN (520-530nm)
- *8NW= FLUORESCENT "WHITE" (NO nm VALUE)
- *10NW= ULTRA BLUE (465-475nm)
- *12NW= SOFT WHITE (NO nm AVAILABLE)
- *MAX. CONTINUOUS CURRENT 10mA.**

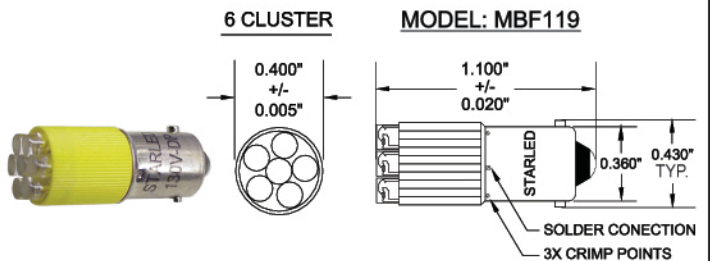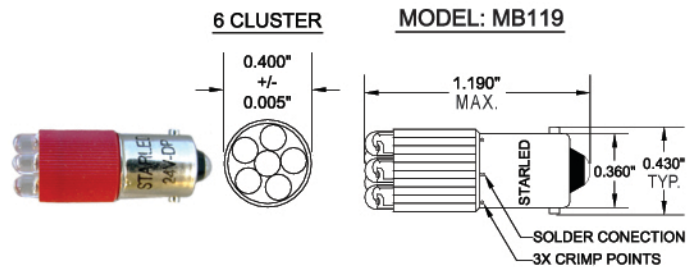


(E) STANDARD DC & AC OPERATING VOLTAGES/mA

6 CLUSTER LED: 6V/75, 12V/50 & 14V/50
7 CLUSTER LED: 18V/25, 24V/25, 28V/25, 36V/25, 48V/12, 60V/15 & 120V/10

NOTE: PLEASE CALL FACTORY FOR OTHER VOLTAGES.

(F) CENTER CONTACT POLARITY

DP= DUAL POLARITY

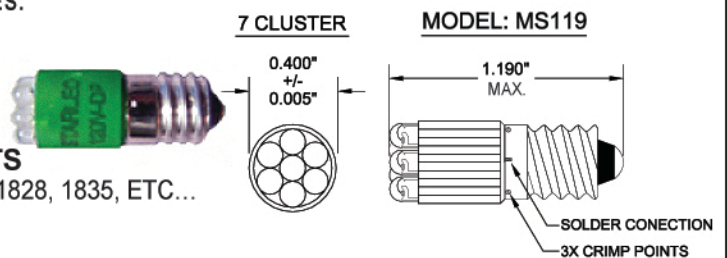

DIRECT INCANDESCENT LAMP REPLACEMENTS

MB: 6MB, 14MB, 24MB, 28MB, 48MB, 60MB, 120MB, 1819, 1828, 1835, ETC...
MS: 40, 46, 1487, 1821, 1832, ETC...

HOUSING MAT'L. UL94VO APPROVED

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE