

Presented By: Candela Corporation
Contact Phone: (800) 922-9226
Contact E-mail: sales@candelacorp.com


Customer Name:
Project Name:
Fixture Type:



GE
Lighting

43697 - Q250CL/DC

GE T4

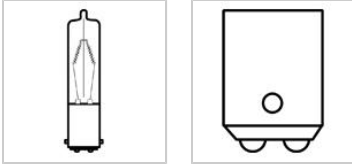

CAUTIONS & WARNINGS

Caution

- Risk of Burn
 - Allow lamp to cool before handling.
 - Turn power off before installing lamp.
- Lamp may shatter and cause injury if broken
 - Dispose of lamp in a closed container.
 - Do not use lamp if outer glass is scratched or broken.

Warning

- Risk of Fire
 - Keep combustible materials away from lamp.
 - Use in enclosed fixture rated for this product.
- Risk of Electric Shock
 - Turn power off before inspection, installation or removal.
- Unexpected lamp rupture may cause injury, fire, or property damage
 - Use eye protection when handling lamp.
 - Use in enclosed fixture rated for this product.
 - Do not touch glass with bare hands.
 - Do not use lamp if outer glass is scratched or broken.
 - Do not exceed 110% of rated voltage.
- Lamp emits UV radiation which may cause eye/skin irritation.
 - Avoid exposure of eyes and skin to unshielded lamp.

GENERAL CHARACTERISTICS

Lamp Type	Halogen - Single-Ended
Bulb	T4
Base	Double Contact Bayonet (BA15d)
Filament	CC-8
Bulb Finish	Clear
Wattage	250
Voltage	120
Rated Life	2000 hrs

PHOTOMETRIC CHARACTERISTICS

Initial Lumens	5000
Color Temperature	2950 K
Nominal Initial Lumens per Watt	20

DIMENSIONS

Maximum Overall Length (MOL)	3 cm
Bulb Diameter (DIA)	0.5 cm
Bulb Diameter (DIA) (MAX)	0.5 cm
Light Center Length (LCL)	1.625 cm

PRODUCT INFORMATION

Product Code	43697
Description	Q250CL/DC
ANSI Code	ESS
Standard Package	Case
Standard Package GTIN	10043168436974
Standard Package Quantity	6
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard	6
Package	
UPC	043168436977