



L.T.F. Low Voltage Electronic Power Supply

60W DC, 120V AC Input
TA60WD12LEDS & TA60WD24LEDS



Efficiency	> 85%
Power Factor	> 98%
Case TC	90C° Max.
Protection	Input / Output
Storage	-30°C / +90°C
Humidity	95% RH Max.
IP Rating	IP 65
Class	Class 2 Power Supply
Standard Dimming	ELV



RoHS



FCC Part 15
Class B compliant



FEATURES


- No load technology, works with both Halogen & LED DC loads**
- Isolated output power per NEC and UL safety requirements
- UL recognized / listed Class 2 power supply, meets UL2108 requirements
- FCC Part 15 Class B compliant
- Auto-reset; short circuit, overload and thermal protection
- Soft Start
- Dimmable with ELV type dimmers
- Low profile, small compact design to fit in most enclosures

ELECTRICAL SPECIFICATIONS

Model #	Input	Output Voltage	Load Type	Form Factor	Dimming
TA60WD12LEDS	120V AC 0.5A, 50/60Hz	12V DC	LED Strips, LED Bulbs, Incandescent & Halogen Bulbs	B5	ELV
TA60WD24LEDS	120V AC 0.5A, 50/60Hz	24V DC	LED Strips, LED Bulbs, Incandescent & Halogen Bulbs	B5	ELV

MECHANICAL SPECS

Available Form Factors	Dimensions
"B5"	67.5 x 33 x 21mm

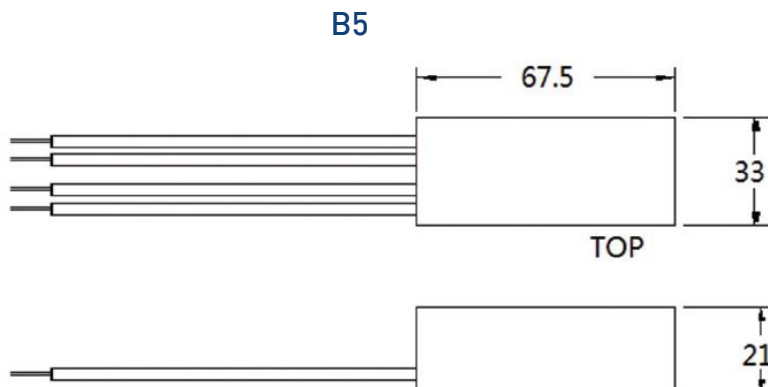

Low Voltage Electronic Transformer